

2.0mm (0.079") Pin Header

(Dual Row)

1205 Series






APPLICATION AND FEATURES

1. Standoffs facilitate post soldering clean.
2. Variable pin length, gold or tin plated.
3. Mate with 2.0mm pitch P.C.Board
Female Connector and shunt connector
such as 1215,1212,1213 & 1206 series.
4. RoHS compliant.

SPECIFICATIONS

Current Rating:	1 Amp
Insulator Resistance:	1000 Megohms min.
Dielectric Withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	245±5°C for 3-5 seconds
Contact Material:	Copper Alloy
Insulator Material:	Nylon 6T, UL 94V-0, Black

Recommended P.C.Board
Hole Layout

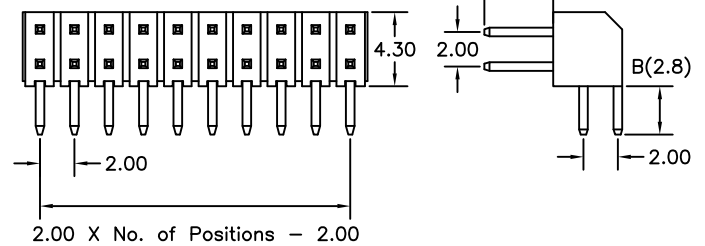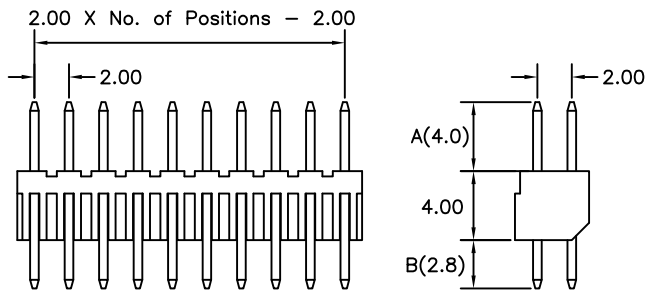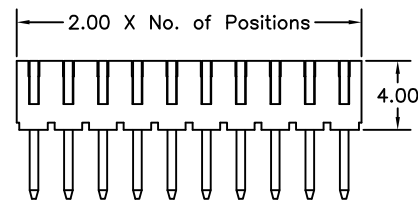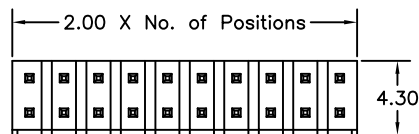

Tolerance: ±0.30mm

Order Information 1205 Series

Example: 1205-20-S1-02-A/B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
1205	06 to 80 Contacts	Straight	Tin Plated 01	A B
		4.0mm Bass S1	Gold Plated	4.0 2.8
		Right Angle	Flash 02	
		4.3mm Bass R	10 μ" 10	
			30 μ" 30	