

# 2.0mm (0.079") Mini Jumper

## Two Circuit Shunt Connector

1206 Series

### APPLICATION AND FEATURES

1. Easiest way of programming by simply connecting 2 contacts together or opposite.
2. Easy applied—No soldering.
3. Double tuning fork type contact guarantees high reliability.
4. 2.00mm pitch low-profile mini type match to 0.50mm SQ. posts.
5. RoHS compliant.







### SPECIFICATIONS

Current Rating:	3 Amp
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	30 m ohm Max.
Dielectric Withstanding:	AC 650 V
Operating Temperature:	-25°C to +85°C
Contact Material:	Phosphor Bronze
Insulator Material:	PBT, UL 94V-0, Black

### M Type: Open

### M Type: Close

### S Type

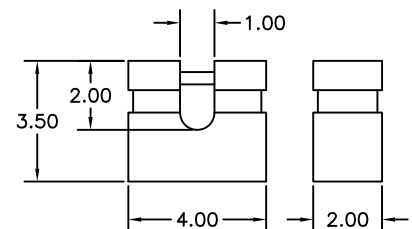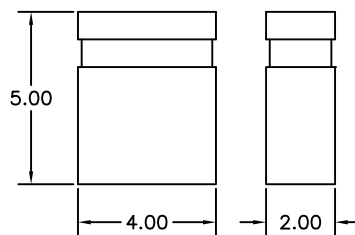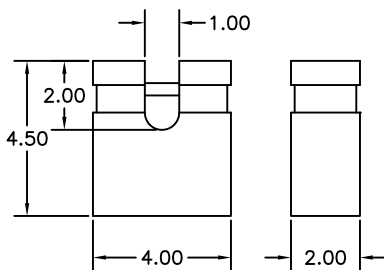

Tolerance:  $\pm 0.30\text{mm}$

### Order Information 1206 Series

Example: 1206 - M - A - 02

Series No.	Height Type	Open or Close	Contact Plating
1206	4.5mm (Open) <input type="checkbox"/> M	Close Type <input type="checkbox"/> A	Tin Plated <input type="checkbox"/> 01
	5.0mm (Close) <input type="checkbox"/> M	Open Type <input type="checkbox"/> B	Gold Plated
	3.5mm <input type="checkbox"/> S		Flash <input type="checkbox"/> 02
			10 $\mu$ " <input type="checkbox"/> 10
			30 $\mu$ " <input type="checkbox"/> 30