

2.00mm (0.079") Multi Mini Jumper

Multiposition Shunt Connector


1208 Series

APPLICATION AND FEATURES

1. Different types from 2 to 10 position.
2. Multiposition jumper versions facilitate multiprogramming.
3. Double tuning fork type contact guarantees high reliability.
4. 2.00mm pitch low-profile mini type match to 0.50mm SQ. posts.
5. RoHS compliant.

SPECIFICATIONS

Current Rating:	2 Amps
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	30 m ohm Max.
Dielectric Withstanding:	AC 650 V
Operating Temperature:	-25°C to +85°C
Contact Material:	Phosphor bronze
Insulator Material:	PBT, UL 94V-0, Black

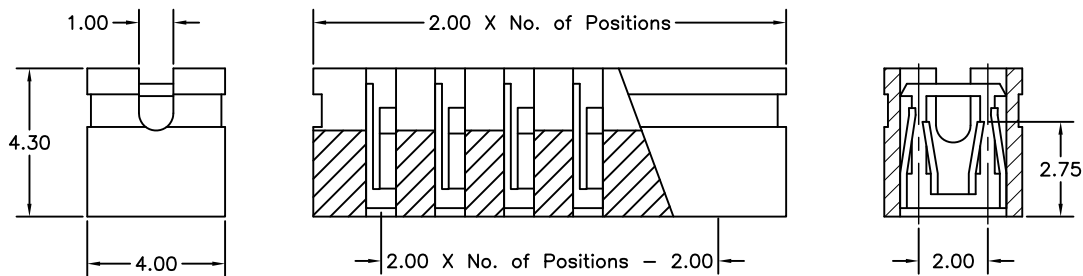

Tolerance: $\pm 0.30\text{mm}$

Order Information 1208 Series

Example: 1208-10-02

Series No.	Number of Contacts	Contact Plating
1208	04 to 20 Contacts 02 to 10 Units	Tin Plated 01 Gold Plated Flash 02 10 μ " 10 30 μ " 30