

2.0mm (0.079") Female Header

(Single Row)

1211 Series






APPLICATION AND FEATURES

1. Low Profile: 4.3mm height.
2. High quality dual beam phosphor bronze contacts.
3. Designed for board to board small spacing interconnection.
4. Standoffs facilitate post soldering clean.
5. Mating with 2.0mm pitch □ 0.5mm Pin Headers, such as 1201 & 1204S series.
6. RoHS complaint.

SPECIFICATIONS

Current Rating:	2 Amp
Insulator Resistance:	3000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	AC 500V
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	245±5°C for 3-5 seconds
Contact Material:	Phosphor Bronze
Insulator Material:	Nylon-6T, UL 94V-0, Black

Recommended P.C.Board
Hole Layout

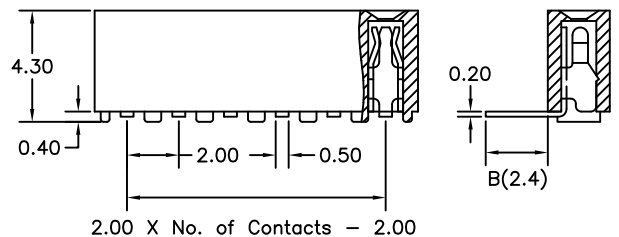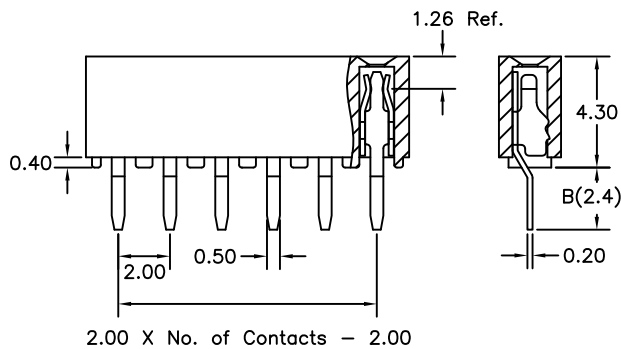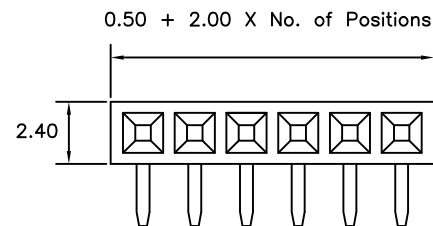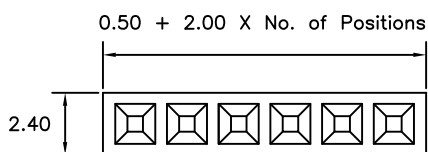

Tolerance: ±0.30mm

Order Information 1211 Series

Example: 1211-34-S-02-B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
1211	02 to 40 Contacts	Straight S	Tin Plated 01	Code
	02 to 40 Contacts (Straight)	Right Angle R	Gold Plated	2.4mm B
	02 to 40 Contacts (Right Angle)		Flash 02	
			10 μ" 10	
			30 μ" 30	