

2.0mm (0.079") Female Header

(Dual Row)




1212 Series

APPLICATION AND FEATURES

1. Low Profile: 4.3mm height.
2. Designed for board to board small spacing interconnection.
3. Mating with 2.0mm pitch □ 0.5mm Pin Headers, such as 1202, 1204D, 1205 & 1302 series.
4. RoHS compliant.

SPECIFICATIONS

Current Rating: 2 Amp
 Insulator Resistance: 3000 Megohms min.
 Contact Resistance: 20 m ohm Max.
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 245±5°C for 3-5 seconds
 Contact Material: Phosphor bronze
 Insulator Material: Nylon 6T, UL 94V-0

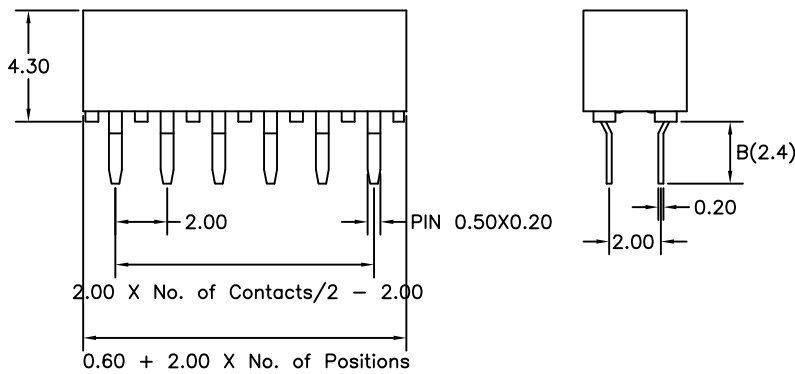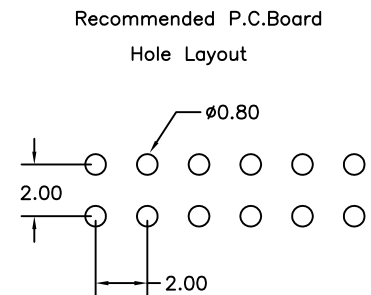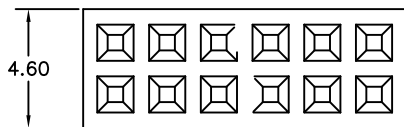

Tolerance: ±0.30mm

Order Information 1212 Series

Example: 1212-34-S-02-B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
1212	04 to 80 Contacts	Straight	Tin Plated 01	Code
			Gold Plated	2.4mm B
			Flash 02	
			10 μ" 10	
			30 μ" 30	