

2.0mm (0.079") Female Header

(Dual Row)



1213 Series

APPLICATION AND FEATURES



1. Low Profile: 4.0mm height.
2. High quality dual beam phosphor bronze contacts.
3. Designed for board to board small spacing interconnection.
4. Mating with 2.0mm pitch □0.5mm Pin Headers. such as 1202, 1204D & 1205 series.
5. RoHS compliant.

SPECIFICATIONS

Current Rating:	2 Amp
Insulator Resistance:	3000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	AC 500V
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	245±5°C for 3-5 seconds
Contact Material:	Phosphor bronze
Insulator Material:	Nylon 6T, UL 94V-0, Black

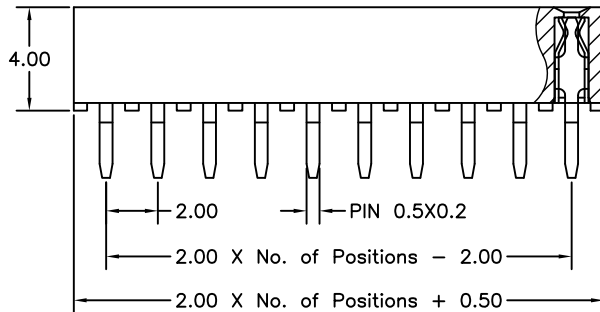

Recommended P.C.Board
Hole Layout

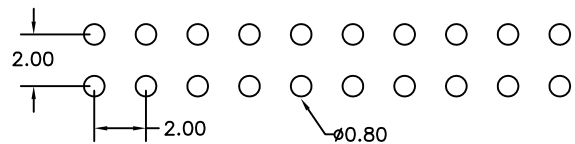

Tolerance: ±0.30mm

Order Information 1213 Series

Example: 1213-20-S1-02-B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
1213	04 to 80 Contacts	4.0mm Base S1	Tin Plated 01	B
			Gold Plated	2.6
			Flash 02	
			10 μ" 10	
			30 μ" 30	