

# 2.0mm (0.079") Female Header

Right Angle  
(Dual Row)

1215 Series





## APPLICATION AND FEATURES

1. High quality Dual-beam phosphor Bronze contact.
2. Designed for right-angle P.C.Board mounting.
3. Mating with 2.0mm pitch 0.5mm Pin Headers. such as 1202, 1204D, 1205 & 1302 series.
4. RoHS compliant.

## SPECIFICATIONS

Current Rating: 2 Amp  
 Insulator Resistance: 3000 Megohms min.  
 Contact Resistance: 20 m ohm Max.  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -40°C to +105°C  
 Max Processing Temp: 245±5°C for 3-5 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Nylon 6T, UL 94V-0, Black

Recommended P.C.Board  
Hole Layout

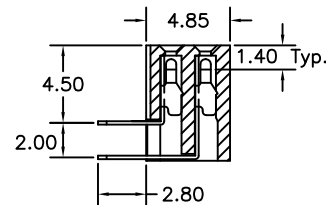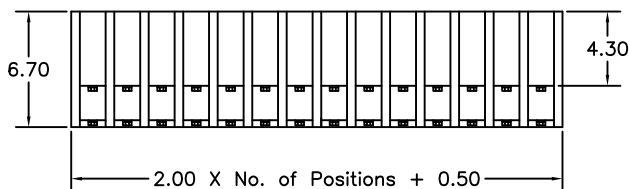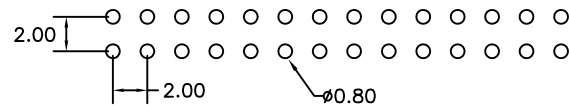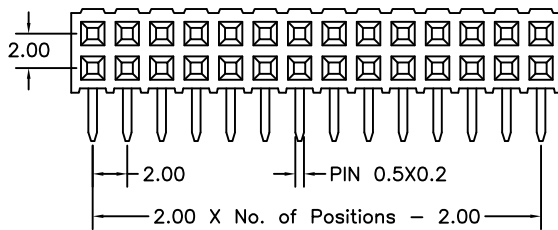

Tolerance: ±0.30mm

## Order Information 1215 Series

Example: 1215-34-R1-02

Series No.	Number of Contacts	Connector Type	Contact Plating
1215	04 to 80 Contacts	Right Angle	Tin Plated 01
		4.85mm Base R1	Gold Plated
			Flash 02
			10 μ" 10
			30 μ" 30