

# 2.0mm (0.079") Side Entry Female Header

(Double Row)




1231 Series

## APPLICATION AND FEATURES

1. High quality dual beam phosphor bronze contacts.
2. Designed for board to board small spacing interconnection.
3. Mating with 2.0mm pitch □0.5mm Pin Headers such as 1202 & 1205 series.
4. RoHS compliant.

## SPECIFICATIONS

Current Rating:	2 Amp
Insulator resistance:	1000 Megohms min.
Contact resistance:	20 m ohm Max.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40° to +105°C
Max Processing Temp:	230°C for 30 seconds (260°C for 5 seconds)
Contact Material:	Phosphor bronze
Insulator Material:	High Temperature Thermoplastic, UL 94V-0

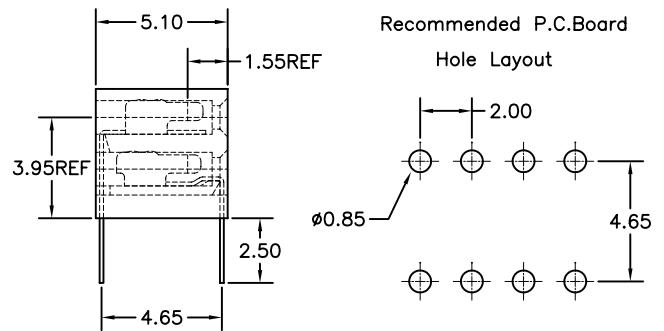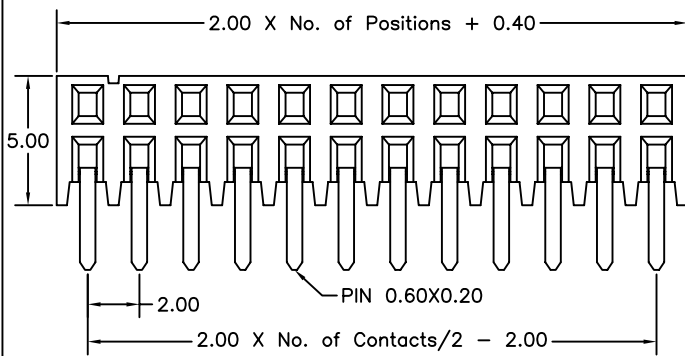

## Order Information 1231 Series

Example: 1231 - 20 - 02 - G

<b>Series No.</b>	<b>Number of Contacts</b>	<b>Contact Plating</b>
1231	04 to 50 Contacts	Tin Plated 01
		Gold Plated
		Flash 02
		10 μ" 10
		30 μ" 30