

2.00mm (0.079") SMT Shrouded Header

With Ejector
(Straight)

1301M Series






APPLICATION AND FEATURES

1. Provides fast connection/disconnection of flat cable assembly (I.D.C. socket)
2. Mate with series: 1101 connector.
3. Assures reliable flat cable-to-P.C.Board interconnection.
4. Fully shrouded.
5. Optional latching features positions coupling/uncoupling.
6. RoHS compliant.

SPECIFICATIONS

Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min. at 500V DC.
 Dielectric Withstanding: 800V AC R.M.S. for 1 minute.
 Operating Temperature: -55°C to +105°C
 Max Processing Temp: 230°C for 30 seconds and 260°C for 5 seconds
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon-6T

RECOMMEND P.C.B. LAYOUT TOP VIEW

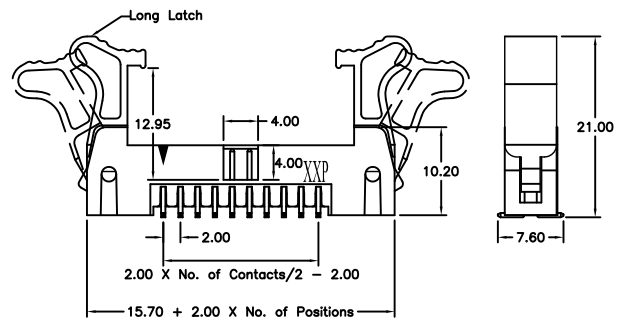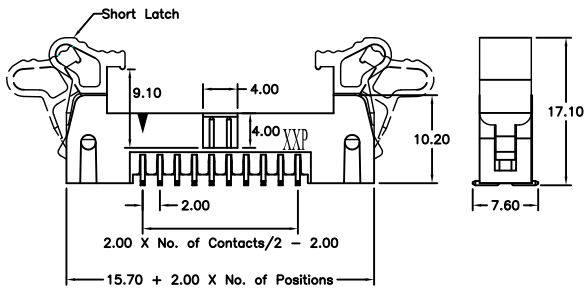

Order Information 1301M Series

Example: 1301M-34-S-02-S

Series No.	Number of Contacts	Connector Type	Contact Plating	Latch Type
1301M	10,12,14,16,20,22,24,26,30,34,40,44,50	Straight S	Tin Plated 01	Optional
			Gold Plated 02	Long latch L
			Flash 10	Short latch S
			10 μ" 10	Without latch N
			30 μ" 30	