

2.00mm (0.079") Shrouded Header

With Ejector

(Straight & Right Angle)

1301 Series







APPLICATION AND FEATURES

1. Provides fast connection/disconnection of flat cable assembly (I.D.C. socket)
2. Mate with series: 1101 connector.
3. Assures reliable flat cable-to-P.C.Board interconnection.
4. Fully shrouded.
5. Optional latching features positions coupling/uncoupling.
6. RoHS compliant.

SPECIFICATIONS

Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min. at 500V DC.
 Dielectric Withstanding: 800V AC R.M.S. for 1 minute.
 Operating Temperature: -55°C to +105°C
 Max Processing Temp: 230°C for 30 seconds and 260°C for 5 seconds
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon-6T

RECOMMEND P.C.B. LAYOUT TOP VIEW

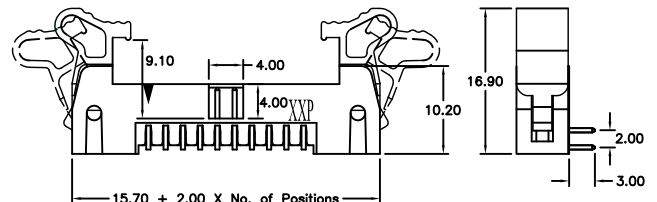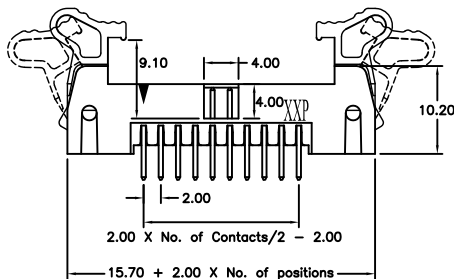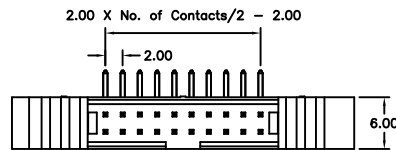

Order Information 1301 Series

Example: - - - - -

Series No.	Connector Type	Contact Plating	Pin Length mm	Latch Type
1301	Straight <input type="text" value="S"/> Right Angle <input type="text" value="R"/>	Tin Plated <input type="text" value="01"/> Gold Plated Flash <input type="text" value="02"/> 10 μ" <input type="text" value="10"/> 30 μ" <input type="text" value="30"/>	S-B <input type="text" value="3.0"/> R-B <input type="text" value="3.0"/>	Optional Short latch <input type="text" value="S"/> Without latch <input type="text" value="N"/>
Number of Contacts	<input type="text" value="10,12,14,16,20,22,24,26,30,34,40,44,50"/>			