

# 2.0mm (0.079") SMT Pin Header

(Double Row)


1302 Series

## APPLICATION AND FEATURES




1. Variable pin length, gold or tin plated.
2. Mate with 2.0mm pitch P.C.Board  
Female Connector such as 1212, 1213, 1215, 1218, 1312, 1731 & 1732 series.
3. RoHS compliant.

## SPECIFICATIONS

Current Rating:	2 Amp
Insulator resistance:	1000 Megohms min.
Dielectric withstanding:	500V AC/DC
Operating Temperature:	-40° to +105°C
Max Processing Temp:	230°C for 30 seconds (260°C for 5 seconds)
Contact Material:	Copper Alloy
Insulator Material:	High Temperature Thermoplastic, UL 94V-0

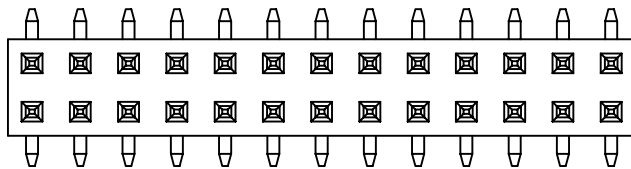

Recommended P.C.Board  
SMD Layout

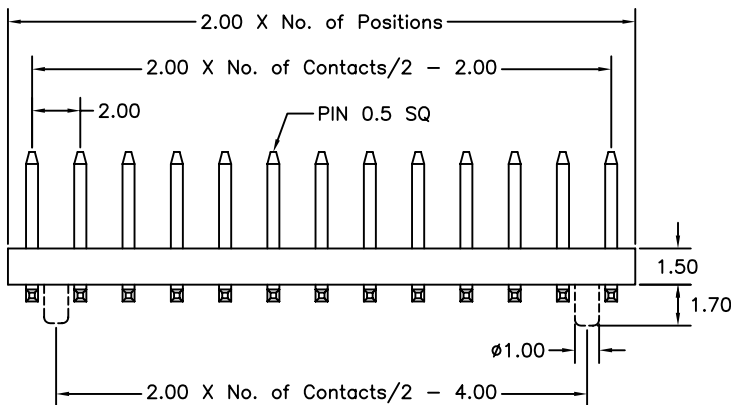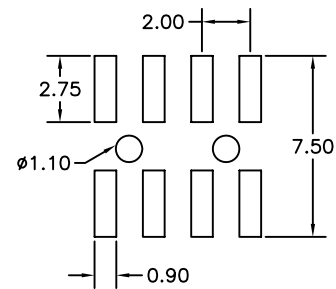

## Order Information 1302 Series

Example: 1302 - 20 - S3 - 02 - 4.0 - 1 - G

