

# 2.0mm (0.079") SMT Pin Header

Board Stacker  
(Double Row)


1302D Series

## APPLICATION AND FEATURES

1. Variable pin length, gold or tin plated.
2. Mate with 2.0mm pitch P.C.Board Female Connector such as 1212, 1213, 1215, 1218, 1312, 1731 & 1732 series.
3. RoHS compliant.

## SPECIFICATIONS

Current Rating:	2 Amp
Insulator Resistance:	3000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	245±5°C for 3-5 seconds
Contact Material:	Brass
Insulator Material:	Nylon 6T, UL 94V-0, Black

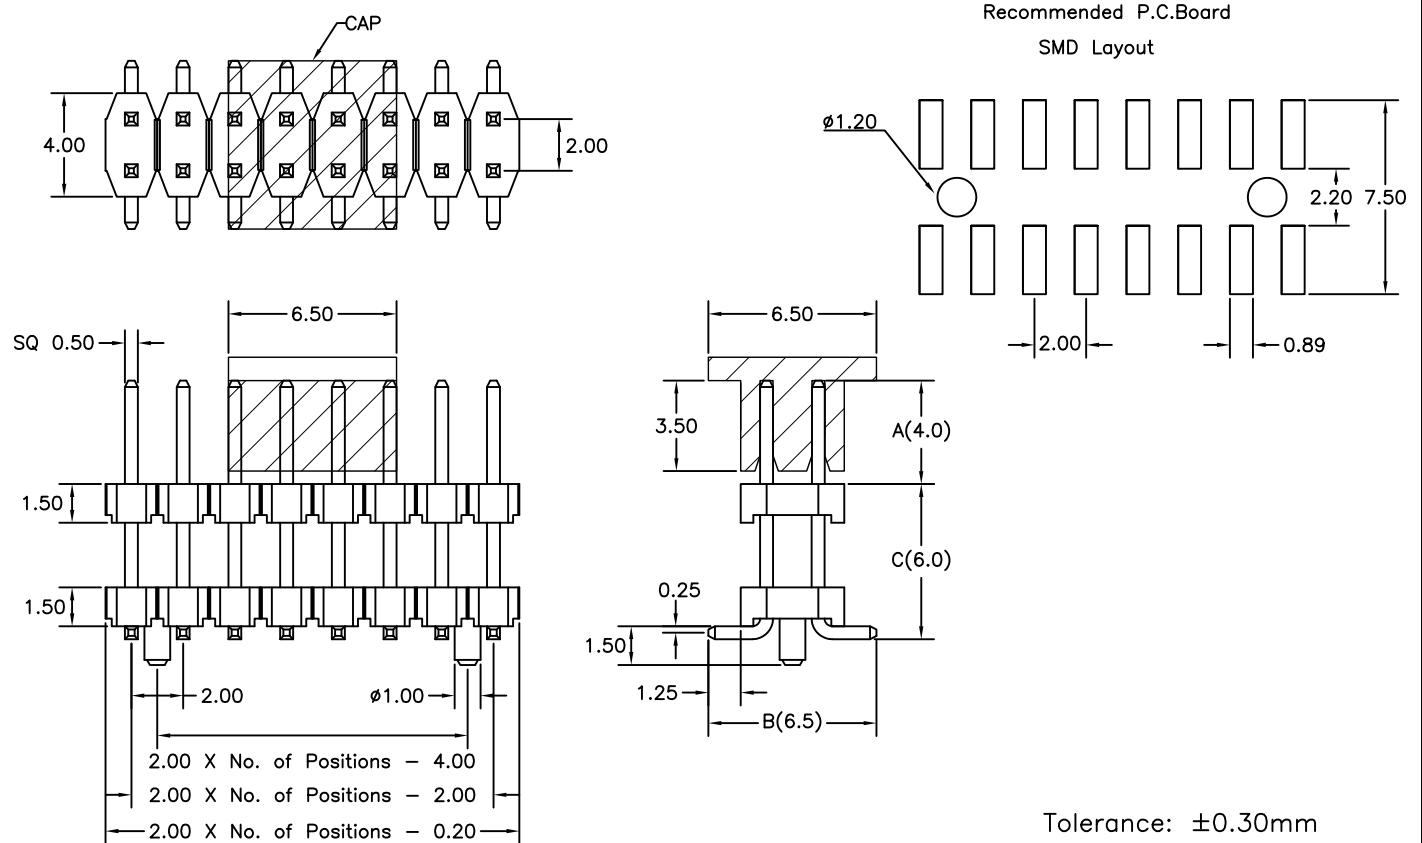

## Order Information 1302D Series

Example: 1302D - 20 - 02 - A/C/B - 1 - PT

Series No.	Number of Contacts	Contact Plating	Pin Length mm
1302D	06 to 80 Contacts	Tin Plated 01	A C B
		Gold Plated	4.0 6.0 6.5
		Flash 02	
		10 μ" 10	
		30 μ" 30	

Null: Tube  
P: Cap+Tube  
PT: Cap+T&R