

2.0mm (0.079") SMT Pin Header

Board Stacker
(Double Row)



1302M Series

APPLICATION AND FEATURES



1. Variable pin length, gold or tin plated.
2. Mate with 2.0mm pitch P.C.Board Female Connector such as 1212, 1213, 1215, 1218, 1312, 1731 & 1732 series.
3. RoHS compliant.

SPECIFICATIONS

Current Rating:	2 Amp
Insulator resistance:	1000 Megohms min.
Dielectric withstanding:	500V AC
Operating Temperature:	-40° to +105°C
Max Processing Temp:	230°C for 30 seconds (260°C for 5 seconds)
Contact Material:	Brass
Insulator Material:	High Temperature Thermoplastic, UL 94V-0

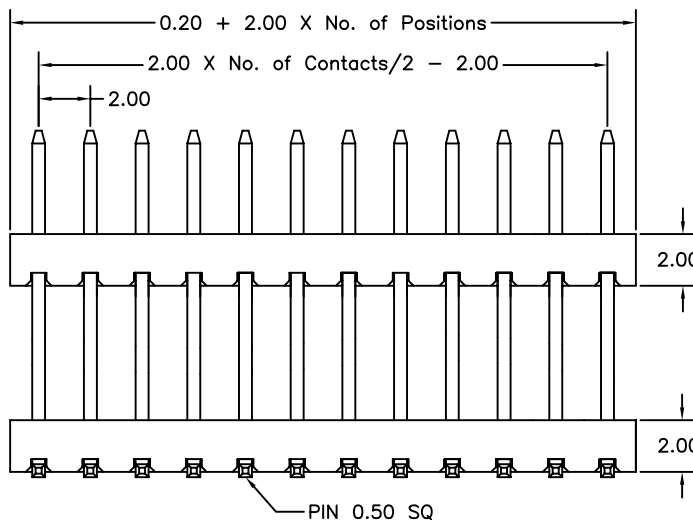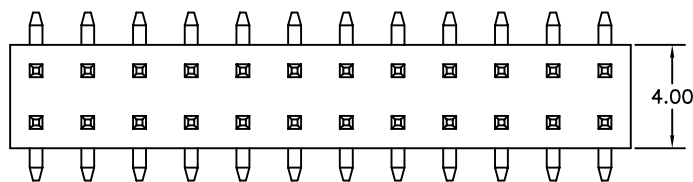

Recommended P.C.Board
SMD Layout

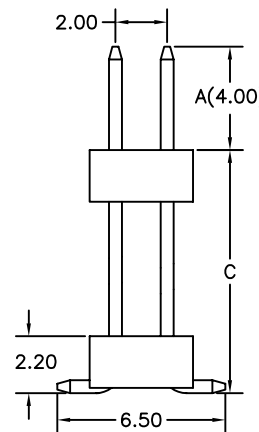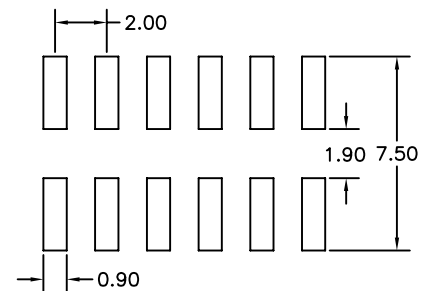

Order Information 1302M Series

Example: 1302M-20-02-A/C-0-G

Series No.	Number of Contacts	Contact Plating	Pin Length mm	0:w/o Locating Peg
1302M	06 to 80 Contacts	Tin Plated 01	A C	
		Gold Plated	4.0 Option	
		Flash 02		
		10 μ" 10		
		30 μ" 30		