

2.0mm (0.079") Shrouded Stacker


1306E Series

APPLICATION AND FEATURES




1. Assures reliable flat cable-to-P.C.Board interconnection.
2. Fully shrouded.
3. No ejector latches is for saving space.
4. RoHs compliant.

SPECIFICATIONS

Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms Min.
 Dielectric Withstanding: AC 800 V
 Operating Temperature: -40°C to +105°C
 Contact Material: Brass
 Insulator Material: Nylon 9T, UL 94V-0, Black
 Nylon 6T, UL 94V-0, Black

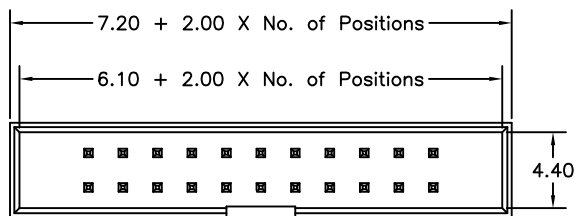

Recommended P.C.Board Hole Layout

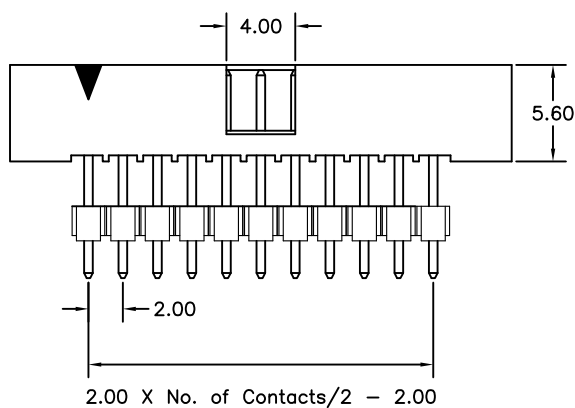

Tolerance: ±0.30mm

Order Information 1306E Series

Example: 1306E-34-S-02-D/E

Series No.	Number of Contacts	Connector Type	Contact Plating			Pin Length mm	
			Tin Plated	Gold Plated	Flash	D	E
1306E	6,8,10,12,14,16,18,20, 22,24,26,28,30,32,34, 36,40,44,50,60,64,68	Straight S	01	10	02	11.0	2.8
				30			