

2.0mm (0.079") Shrouded Header








1306 Series

APPLICATION AND FEATURES

1. Assures reliable flat cable-to-P.C.Board interconnection.
2. Fully shrouded.
3. No ejector latches is for saving space.
4. RoHs compliant.

SPECIFICATIONS

Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms Min.
 Dielectric Withstanding: AC 800V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230° for 30 seconds
 (260° for 5 seconds)
 Contact Material: Brass
 Insulator Material: Nylon 9T (UL 94V-0), Black

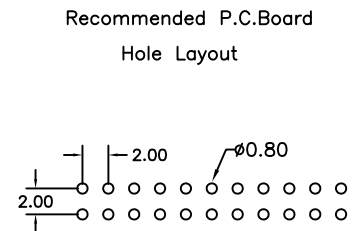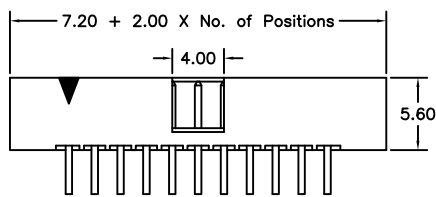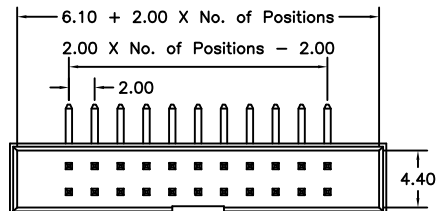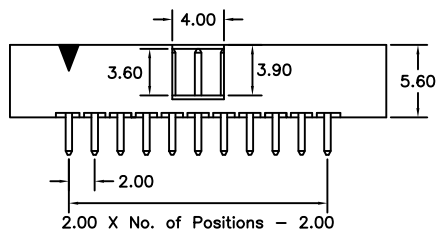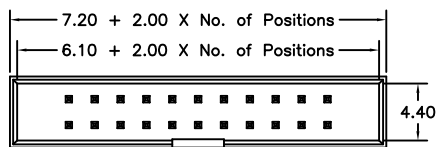

Tolerance: ±0.30mm

Order Information 1306 Series

Example: 1306-34-S-02

Series No.	Number of Contacts	Connector Type	Contact Plating
1306	6,8,10,12,14,16,18,20, 22,24,26,28,30,32,34, 36,40,44,50,60,64,68	Straight <input type="checkbox"/> S Right Angle <input type="checkbox"/> R	Tin Plated <input type="checkbox"/> 01 Gold Plated Flash <input type="checkbox"/> 02 10 μ" <input type="checkbox"/> 10 30 μ" <input type="checkbox"/> 30