

2.0mm (0.079") Elevated Female Header

(Dual Row)
(Straight)


1712 Series

APPLICATION AND FEATURES

1. Mating with 2.0mm pitch 0.5mm Pin Headers. such as 1202, 1204D & 1205 series.
2. RoHS compliant.

SPECIFICATIONS

Current Rating: 2 Amp
Insulator resistance: 1000 Megohms min.
Contact resistance: 20 m ohm Max.
Dielectric withstanding: 500V AC
Operating Temperature: -40°C to +105°C
Max Processing Temp: 230°C for 30 seconds
(260°C for 5 seconds)
Contact Material: Phosphor bronze
Insulator Material: High Temperature Thermoplastic, UL 94V-0

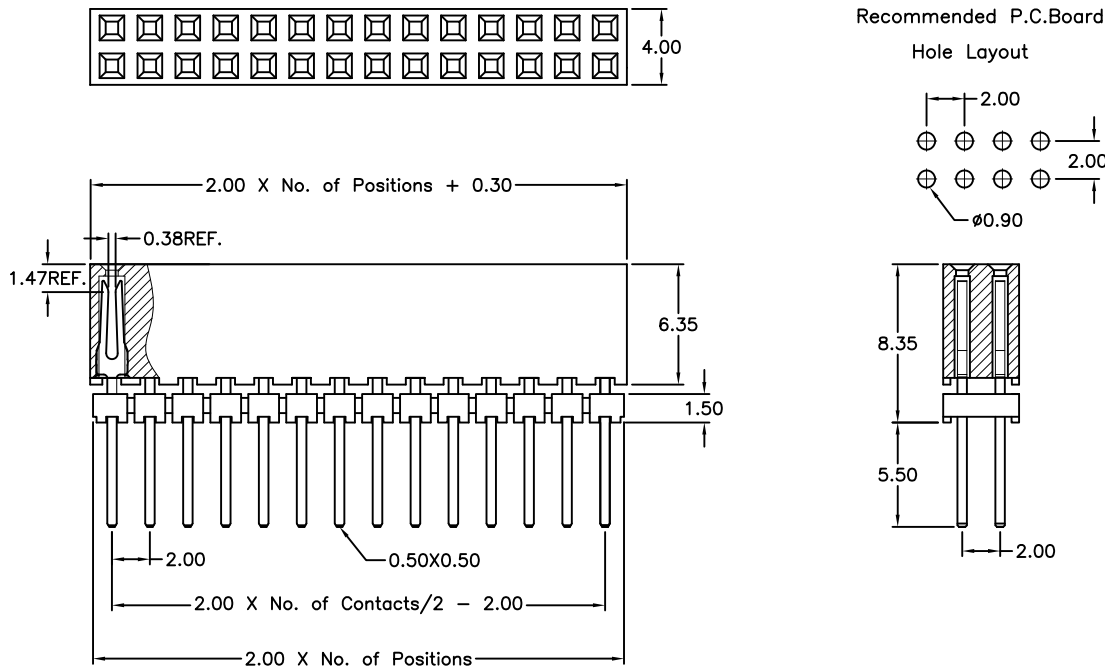

Order Information 1712 Series

Example: 1712-40-02-1X-G

Series No.	Number of Contacts	Contact Plating
1712	04 to 60 Contacts	Tin Plated 01
		Gold Plated
		Flash 02
		10 μ" 10
		30 μ" 30