

2.0mm (0.079") Elevated Female Header

(Dual Row)

1732 Series


APPLICATION AND FEATURES

1. Profile: 9.35mm height.
2. High quality phosphor bronze contacts.
3. Designed for board to board small spacing interconnection.
4. Standoffs facilitate post soldering clean.
5. Mating with 2.0mm pitch □ 0.5mm Pin Headers such as 1202, 1204D & 1205 series.
6. RoHS compliant.

SPECIFICATIONS

Current Rating:	2 Amp
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	245±5°C for 3-5 seconds
Contact Material:	Phosphor bronze
Insulator Material:	Nylon 9T, UL 94V-0
Pin Header:	Nylon 6T, UL 94V-0

Recommended P.C.Board
Hole Layout

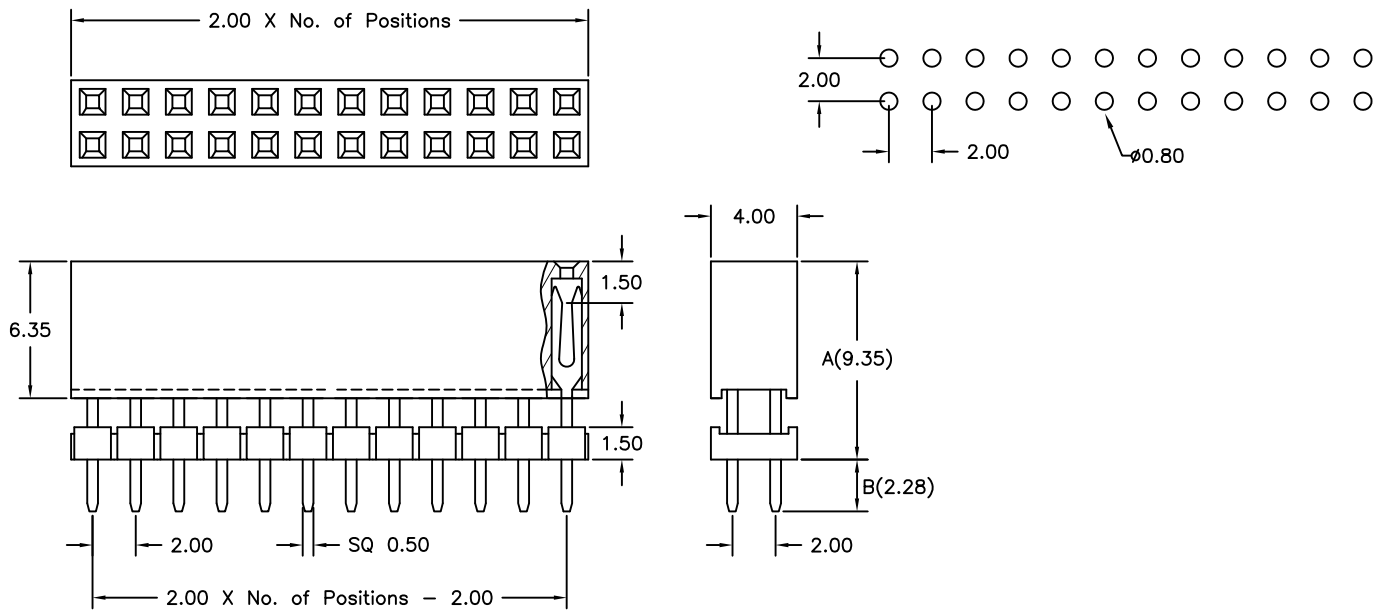

Tolerance: ±0.30mm

Order Information 1732 Series

Example: 1732-40-02-A/B

Series No.	Number of Contacts	Contact Plating	Pin Length mm	
1732	04 to 80 Contacts	Tin Plated 01	A	B
		Gold Plated	9.35	2.28
		Flash 02		
		10 μ" 10		
		30 μ" 30		