

2.00mm (0.079") SMT Pin Header

Right Angle Type
(Single Row)


1812 Series

APPLICATION AND FEATURES




1. Variable pin length.
2. RoHS compliant.

SPECIFICATIONS

Current Rating: 2 Amps
 Insulator resistance: 1000 Megohms min.
 Dielectric withstanding: 500V AC
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 230°C for 30 seconds and
 260°C for 5 seconds
 Contact Material: Brass
 Insulator Material: Nylon 6T, UL 94V-0

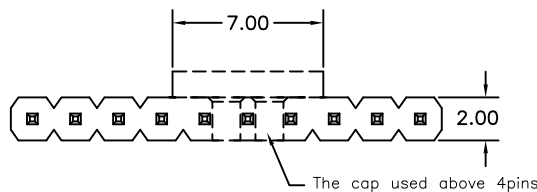

Recommended P.C.Board

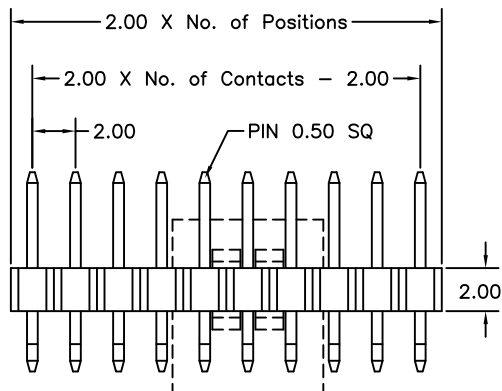

Order Information 1812 Series

Example: 1812 - 10 - R - 02 - 4.45 - 0 - PT - G

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
1812	02 to 40 Contacts	Right Angle R	Tin Plated 01 Gold Plated 02 Flash 10 μ" 10 30 μ" 30	A 4.45
				Null : Tube P : Cap + Tube PT: Cap + T&R 0:W/O Locating peg