

2.54mm (0.1") Pin Header

(Double Row)

2100 Series







APPLICATION AND FEATURES

1. Variable pin length.
2. Standoffs facilitate post soldering clean.
3. Mate with P.C.Board connectors such as 2206, 2221, 2222, 2223, 2225, 2226 & 2227 series.
4. RoHS compliant.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: -40°C to +105°C
 Contact Material: Copper Alloy
 Insulator Material: PBT, UL 94V-0, Black

Recommended P.C.Board Hole Layout

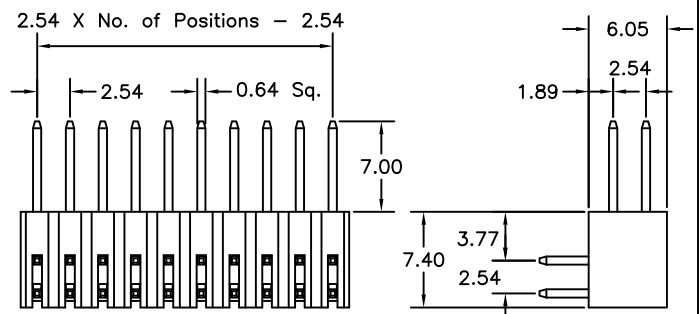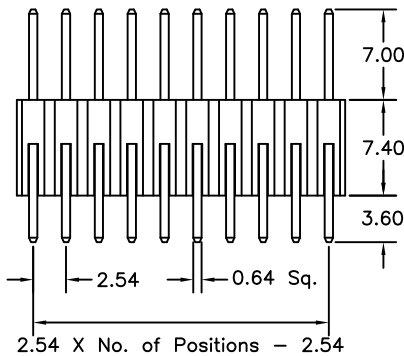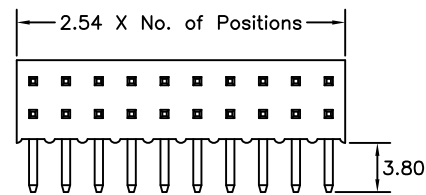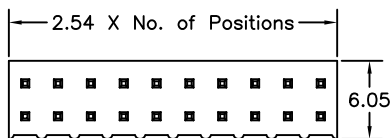

Tolerance: ±0.30mm

Order Information 2100 Series

Example: 2100 - 20 - S - 02 - A/B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2100	04 to 80 Contacts	Straight S	Tin Plated 01	Straight 7.0/3.6
		Right Angle R	Gold Plated Flash 02	Right Angle 7.0/3.8
			10 μ" 10	
			30 μ" 30	