

2.54mm (0.1") SMT Pin Header

Board Spacer
(Double Row)




2200 Series

APPLICATION AND FEATURES


1. Variable pin length.
2. Mate with P.C.Board connectors such as 2206, 2221, 2222, 2223, 2225, 2226, 2227 & 2833 series.
3. RoHS compliant.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator resistance:	1000 Megohms min.
Dielectric withstanding:	600V AC/DC
Operating Temperature:	-40° to +105°C
Max Processing Temp:	230°C for 30 seconds (260°C for 5 seconds)
Contact Material:	Brass
Insulator Material:	High Temperature Thermoplastic, UL 94V-0

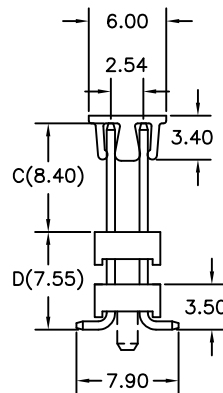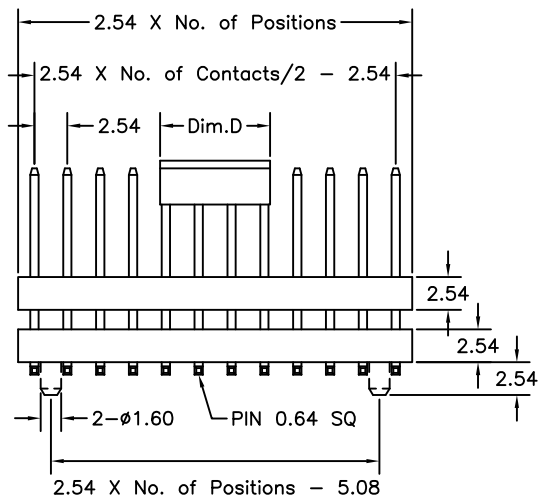

Recommended P.C.Board
Hole Layout

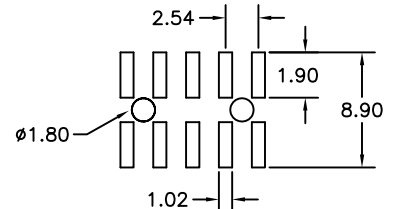

Dim.D	NOTE
5.00mm	06~16pins
8.05mm	18~80pins

Order Information 2200 Series

Example: 2200 - 20 - 02 - C/D - 1 - PT - G

