

2.54mm (0.1") Pin Header

(Triple Row)

2203 Series

APPLICATION AND FEATURES








1. Notches for easy breakable.
2. Variable pin length.
3. Standoffs facilitate post soldering clean.
4. Suggestion mating with 2238, 2239 & 2713 series.
5. RoHS compliant.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min.
 Contact Resistance: 20 m ohm Max.
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -40°C to +105°C
 Max Processing Temp: 245±5°C for 3-5 seconds
 Contact Material: Brass
 Insulator Material: Nylon 6T, UL 94V-0, Black

Recommended P.C.Board

Hole Layout

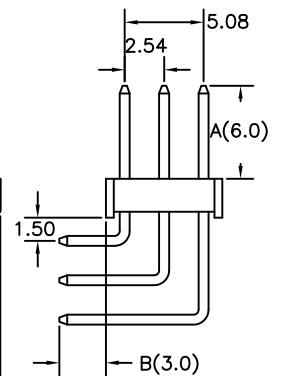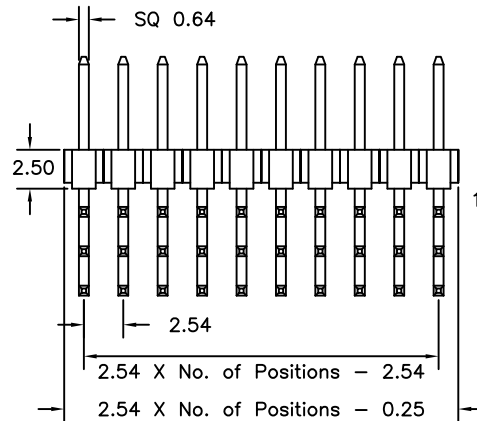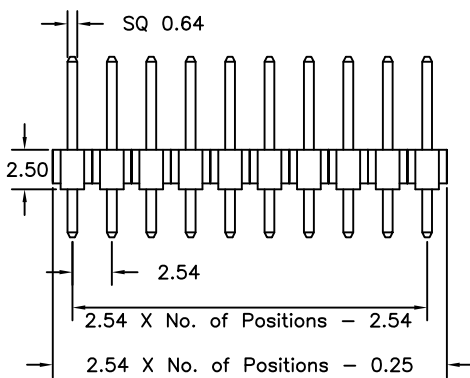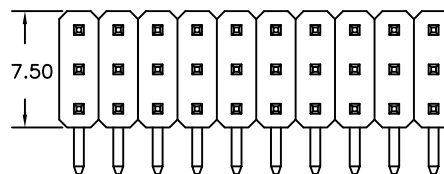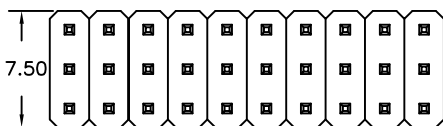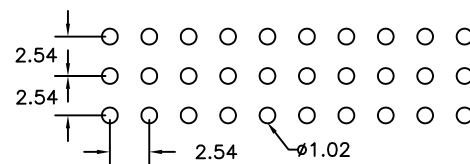

Tolerance: ±0.30mm

Order Information 2203 Series

Example: 2203-20-S-02-A/B-HT

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2203	09 to 120 Contacts	Straight S Right Angle R	Tin Plated 01 Gold Plated Flash 02 10 μ" 10 30 μ" 30	A 6.0 B 3.0