

# 2.54mm (0.1") Pin Header

(Triple Row)

2203 Series

## APPLICATION AND FEATURES








1. Notches for easy breakable.
2. Variable pin length.
3. Standoffs facilitate post soldering clean.
4. Suggestion mating with 2238, 2239 & 2713 series.
5. RoHS compliant.

## SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms min.  
 Contact Resistance: 20 m ohm Max.  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -25°C to +85°C  
 Contact Material: Brass  
 Insulator Material: PBT, UL 94V-0, Black

### Recommended P.C.Board

#### Hole Layout

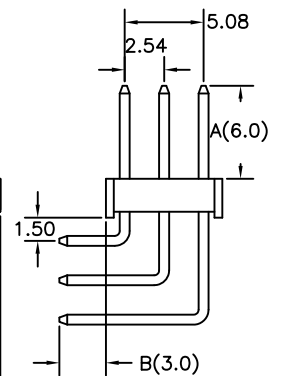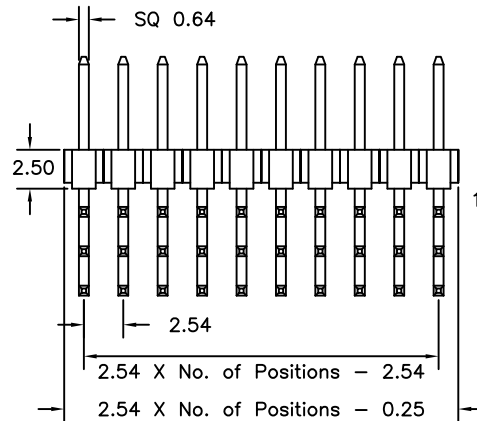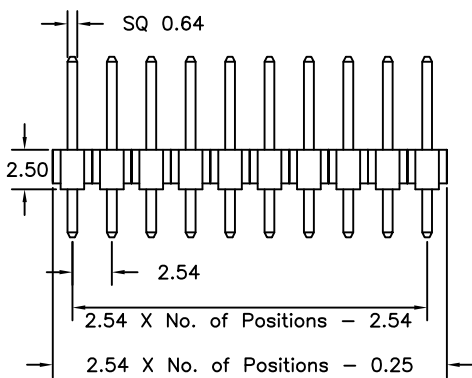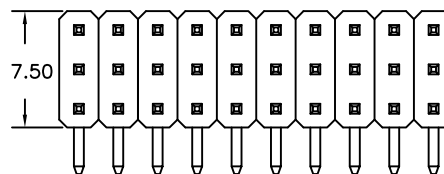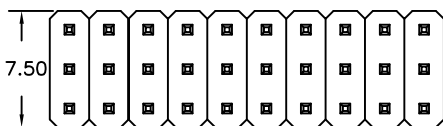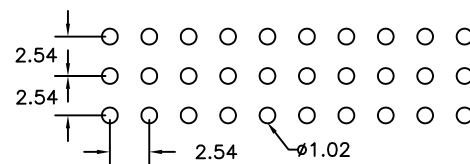

Tolerance: ±0.30mm

## Order Information 2203 Series

Example: 2203-20-S-02-A/B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2203	09 to 120 Contacts	Straight S Right Angle R	Tin Plated 01 Gold Plated Flash 02 10 μ" 10 30 μ" 30	A 6.0 B 3.0