

2.54mm (0.1") Mini Jumper

Two Circuit Shunt Connector


2206 Series

APPLICATION AND FEATURES

1. Easiest way of programming by simply connecting 2 contacts together or opposite.
2. Easy applied—No soldering.
3. All side stackable.
4. Low cost alternative to DIP switch.
5. Mate with 2.54mm grid male header connectors.
6. RoHS compliant.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator Resistance:	1000 Megohms min.
Dielectric Withstanding:	AC 500 V
Operating Temperature:	-25°C to +85°C
Contact Material:	Brass
Insulator Material:	PBT, UL 94V-0, Black

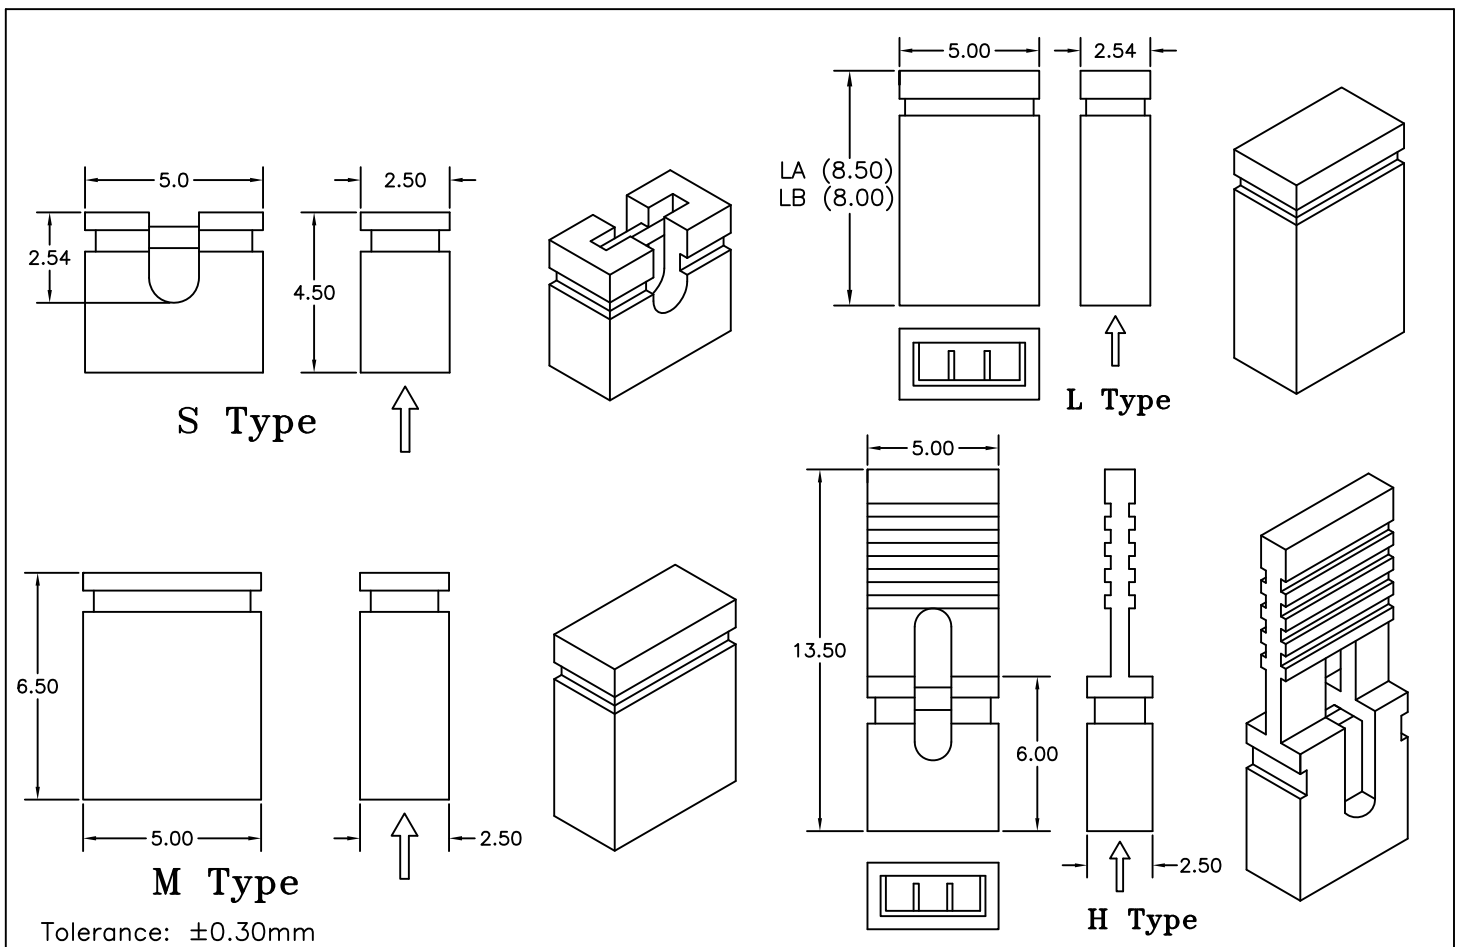

Order Information 2206 Series

Example: 2206-S-A-02

Series No.	Height Type				Open or Close		Contact Plating	
	Definition	Code	Definition	Code	Close	Open	Tin Plated	Flash
2206	4.5mm	S	8.0mm (Open)	L	A	B	01	02
	6.0mm (Open)	M	8.5mm (Close)	L			10 μ"	10
	6.5mm (Close)	M	13.5mm	H			30 μ"	30