

2.54mm (0.1") Multi Mini Jumper

Multiposition Shunt Connector





2208 Series

APPLICATION AND FEATURES

1. Different types from 2 to 10 position.
2. Multiposition jumper versions facilitate multiprogramming.
3. Dual Beam contact.
4. Mate with 2.54mm grid male header connectors.
5. RoHS compliant.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator Resistance:	1000 Megohms min.
Dielectric Withstanding:	AC 650 V
Operating Temperature:	-25° to +85°C
Contact Material:	Brass
Insulator Material:	PBT, UL 94V-0

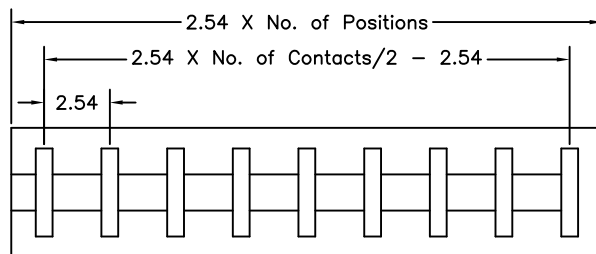

Tolerance: $\pm 0.30\text{mm}$

Order Information 2208 Series

Example: 2208-10-02-

Series No.	Number of Contacts	Contact Plating	Color
2208	04 to 20 Contacts 02 to 10 Units	Tin Plated 01	Null : Black
		Gold Plated 02	R : Red
		Flash 10	BL : Blue
		10 μ " 30	
		30 μ "	