

2.54mm (0.1") Female Header

(Single Row, Straight & Right Angle)

2211-HT Series

APPLICATION AND FEATURES






1. For standard profile application 8.5mm high.
2. Accepts 0.64mm square pin.
3. Tuning-fork type contacts designed for low cost.
4. Suggestion mating with 2201, 2201A, 2204S & 2812 series.
5. RoHS compliant.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	30 m ohm Max.
Dielectric Withstanding:	AC 1000 V
Operating Temperature:	-40°C to +105°C
Contact Material:	Copper Alloy
Insulator Material:	Nylon 6T, UL 94V-0

Recommended P.C.Board

Hole Layout

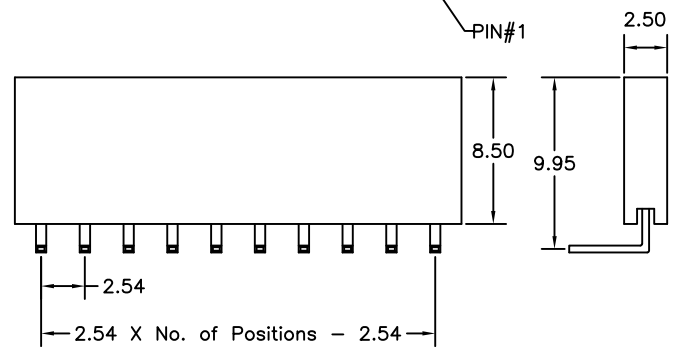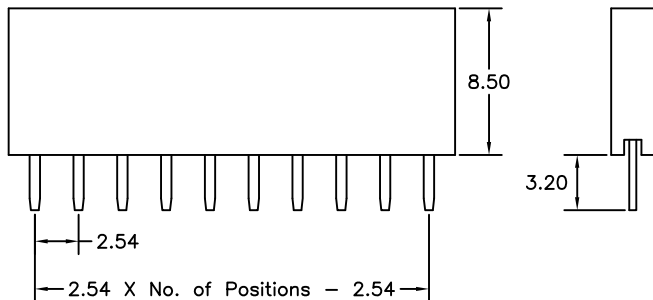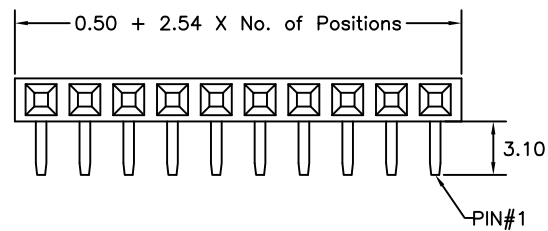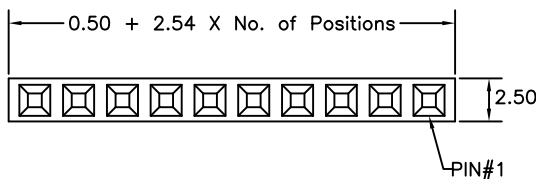

Tolerance: $\pm 0.30\text{mm}$

Order Information 2211 Series

Example: 2211-34-S-02-3.2-HT

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2211	02 to 40 Contacts	Straight S	Tin Plated 01	S-B R-B
		Right Angle R	Gold Plated Flash 02	3.2 3.1
			10 μ " 10	
			30 μ " 30	