

# 2.54mm (0.1") Female Header

(Single Row, Straight & Right Angle)

2211 Series

## APPLICATION AND FEATURES






1. For standard profile application 8.5mm high.
2. Accepts 0.64mm square pin.
3. Tuning-fork type contacts designed for low cost.
4. Suggestion mating with 2201, 2201A, 2204S & 2812 series.
5. RoHS compliant.

## SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator Resistance: 1000 Megohms min.  
 Contact Resistance: 30 m ohm Max.  
 Dielectric Withstanding: AC 1000 V  
 Operating Temperature: -40°C to +105°C  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 ©Standard: P.B.T

### Recommended P.C.Board

#### Hole Layout

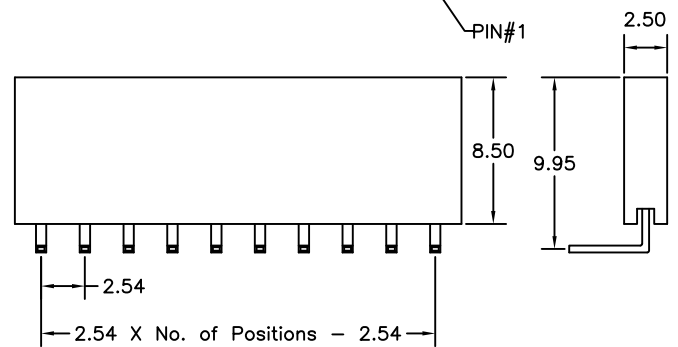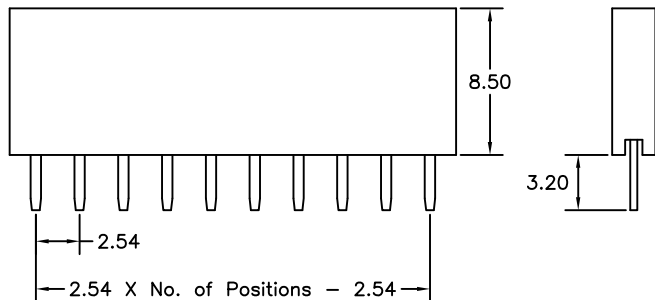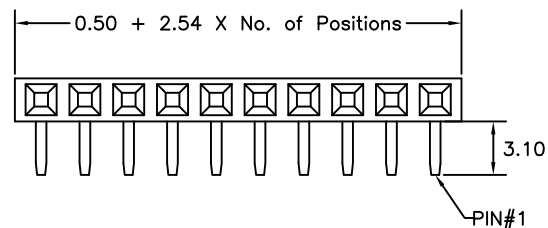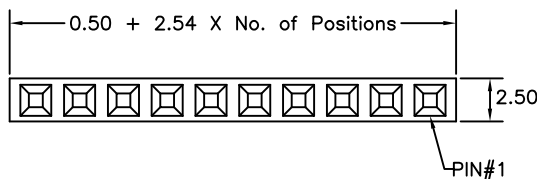

Tolerance: ±0.30mm

## Order Information 2211 Series

Example: 2211-34-S-02-3.2

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2211	02 to 40 Contacts	Straight S	Tin Plated 01	S-B R-B
		Right Angle R	Gold Plated Flash 02	3.2 3.1
			10 μ" 10	
			30 μ" 30	