

# 2.54mm (0.1") Female Header

(Single Row, Straight & Right Angle)

2213 Series


## APPLICATION AND FEATURES

1. Low profile 5mm height.
2. Designed for parallel and vertical board stacking.
3. Dual-beam folded contact and low insertion force.
4. Standoffs facilitate post soldering clean.
5. Suggestion mating with 2201, 2201A, 2204S & 2812 series.
6. RoHS compliant.

## SPECIFICATIONS

Current Rating:	3 Amps
Insulator Resistance:	5000 Megohms min.
Contact Resistance:	20m Ohm Max.
Dielectric Withstanding:	AC 500V
Operating Temperature:	-40°C to +105°C
Max Processing Temp:	245±5°C for 3-5 seconds
Contact Material:	Phosphor Bronze
Insulator Material:	Nylon 6T, UL 94V-0, Black

Recommended P.C.Board  
Hole Layout

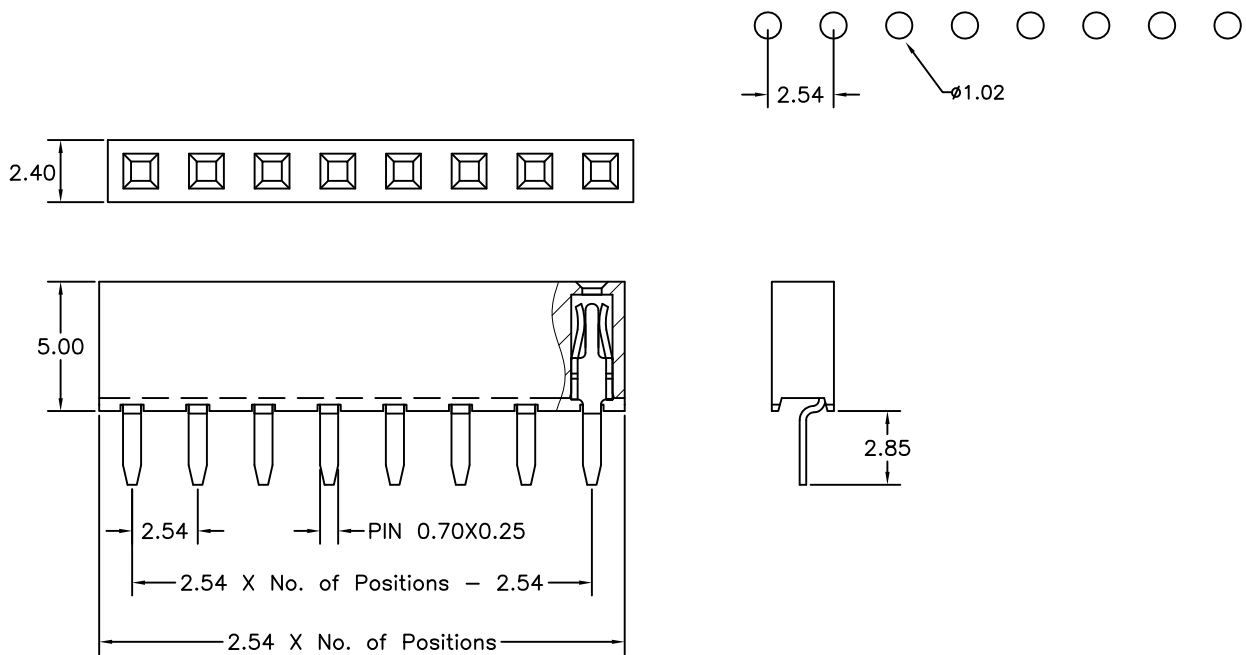

## Order Information 2213 Series

Example: 2213-34-S-02-J

Series No.	Number of Contacts	Connector Type	Contact Plating
2213	02 to 40 Contacts	Straight S	Tin Plated 01
			Gold Plated Flash 02
			10 μ" 10
			30 μ" 30