

2.54mm (0.1") Female Header

Dual Beam Contacts
(Single Row, Straight)


2214 Series

APPLICATION AND FEATURES




1. For profile application 8.5mm high.
2. Accepts 0.64mm square pin .
3. Suggestion mating with 2201, 2201A, 2204S & 2812 series.
4. RoHS compliant.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 20 m ohm Max.
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: -40°C to +105°C
 Contact Material: Copper Alloy
 Insulator Material: Nylon 6T, UL 94V-0

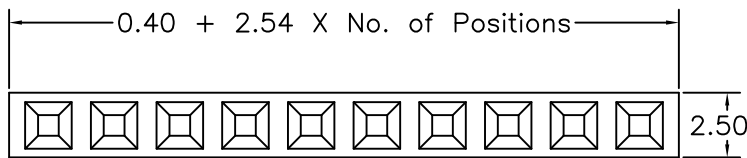

Recommended P.C.Board
Hole Layout

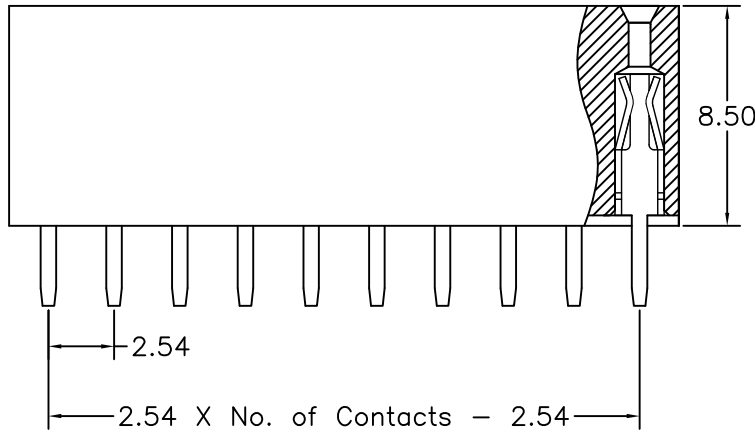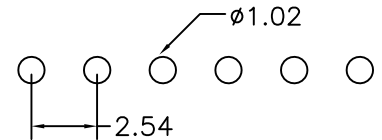

Tolerance: ±0.30mm

Order Information 2214 Series

Example: 2214-34-S-02

Series No.	Number of Contacts	Connector Type	Contact Plating
2214	02 to 40 Contacts	Straight S	Tin Plated 01
			Gold Plated
			Flash 02
			10 μ" 10
			30 μ" 30