

# 2.54mm (0.1") Female Header

(Single Row, Straight & Right Angle)

2215 Series





## APPLICATION AND FEATURES

1. Standoffs facilitate post soldering clean.
2. Dual-beam folded contact.
3. Suggestion mating with 2201, 2201A, 2204S & 2812 series.
4. RoHS compliant.

## SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms min.  
 Contact Resistance: 20 m ohm Max.  
 Dielectric Withstanding: 500V AC/DC  
 Operating Temperature: -25°C to +85°C  
 Contact Material: Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0  
 ©Standard: P.B.T

Recommended P.C.Board  
Hole Layout

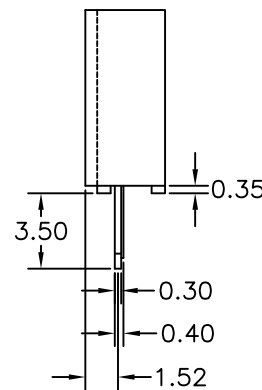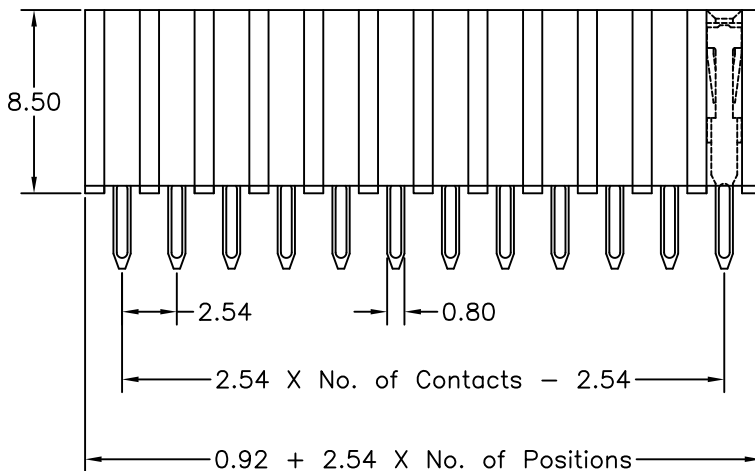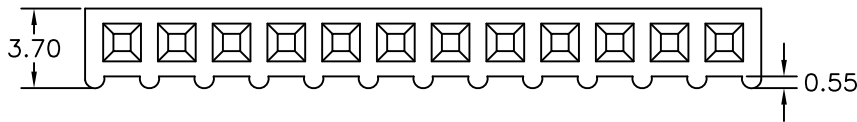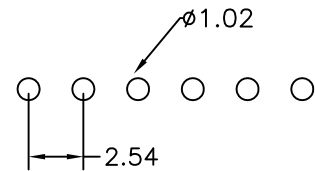

Tolerance: ±0.30mm

## Order Information 2215 Series

Example: 2215-34-S-02

Series No.	Number of Contacts	Connector Type	Contact Plating
2215	03 to 40 Contacts	Straight S	Tin Plated 01
			Gold Plated
			Flash 02
			10 μ" 10
			30 μ" 30

Date: 2-21-2014