

2.54mm (0.1") Female Header

(Single Row)

2217 Series





APPLICATION AND FEATURES

1. For profile application 7.1mm high.
2. Accepts 0.64mm square pin.
3. Dual beam contacts.
4. Suggestion mating with 2201, 2201A, 2204S & 2812 series.
5. RoHS compliant.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 30 m ohm Max.
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: -40°C to +105°C
 Contact Material: Copper Alloy
 Insulator Material: Nylon 6T, UL 94V-0

Recommended P.C.Board Hole Layout

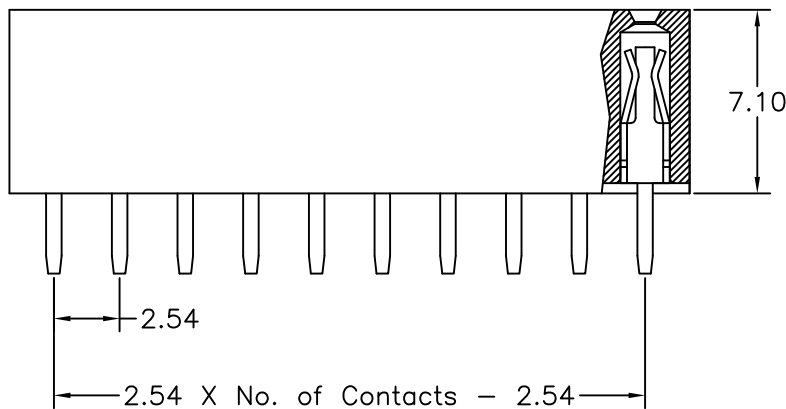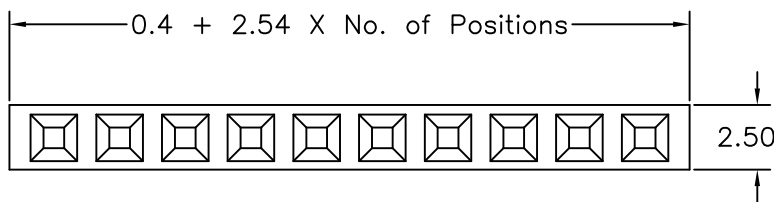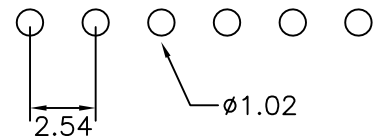

Tolerance: ±0.30mm

Order Information 2217 Series

Example: 2217 - 20 - S - 02

Series No.	Number of Contacts	Connector Type	Contact Plating
2217	04 to 40 Contacts	Straight	S
			Tin Plated 01
			Gold Plated
			Flash 02
			10 μ" 10
			30 μ" 30