

# 2.54mm (0.1") Female header

Low Profile: 3.5mm  
(Single Row)


2218 Series

## APPLICATION AND FEATURES




1. Low profile application 3.5mm height.
2. Accept 0.64 square pin header.
3. Suggestion mating with 2201, 2201A, 2204S & 2812 series.
4. RoHS compliant.

## SPECIFICATIONS

Current & Voltage Rating: 3A & 25Vac max.  
Insulation Resistance: 5000 MΩ min.  
Contact Resistance: 20 mΩ max.  
Dielectric Withstanding: AC 500 V  
Operating Temperature: -25°C ~ +85°C  
Contact Material: Phosphor Bronze  
Insulator Material: PBT, UL 94V-0, Black



Recommended P.C.Board  
Hole Layout

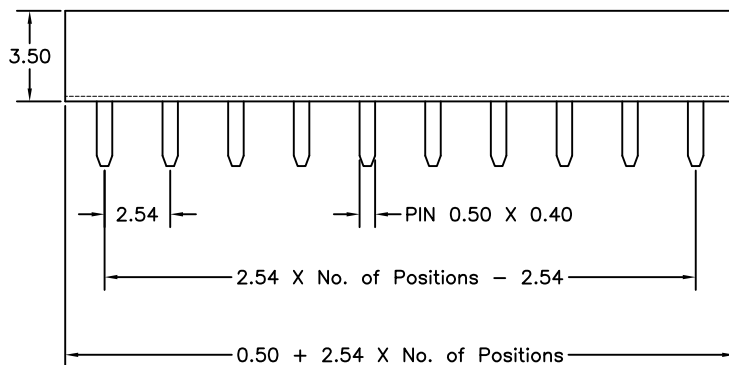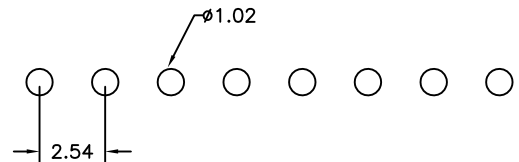

Tolerance: ±0.30mm

## Order Information 2218 Series

Example: 2218-15-02

Series No.

2218

Number of Contacts

02 to 28 Contacts

Contact Plating

Tin Plated 01

Gold Plated

Flash 02

10 μ" 10

30 μ" 30