

2.54mm (0.1") Female Header

(Dual Row, Straight & Right angle)

2221 Series






APPLICATION AND FEATURES

1. For standard profile application 8.5mm high.
2. Accept 0.64mm square pin with closed entry.
3. Tuning-fork type contacts designed for low cost.
4. Different foot length for customer design choice.
5. Mate with pin header such as 2202,2205,2100 & 2204D series.
6. RoHS compliant.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 30 m ohm Max.
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: -40°C to +105°C
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 ©Standard: P.B.T

Recommended P.C.Board
Hole Layout

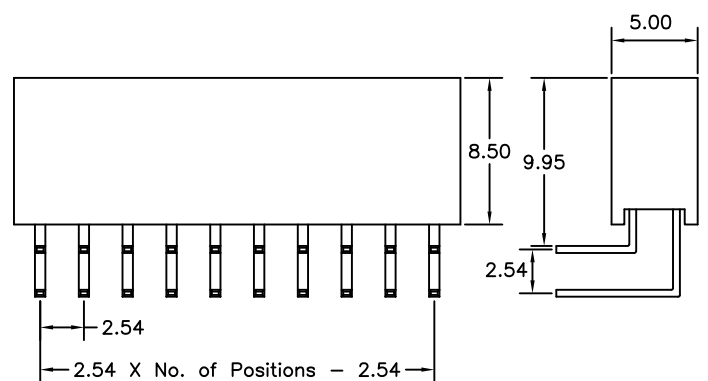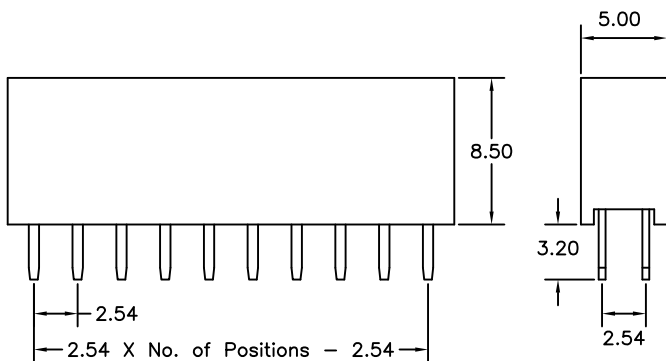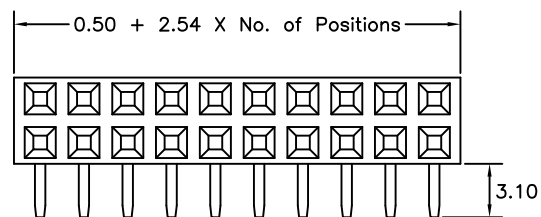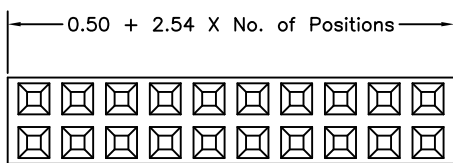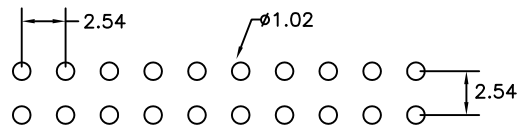

Tolerance: ±0.30mm

Order Information 2221 Series

Example: 2221-34-S-02-3.2

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2221	04 to 80 Contacts	Straight S	Tin Plated 01	S-B R-B
		Right Angle R	Gold Plated Flash 02	3.2 3.1
			10 μ" 10	
			30 μ" 30	