

# 2.54mm (0.1") Female Header

(Dual Row, Straight & Right Angle)

2222 Series








## APPLICATION AND FEATURES

1. For low profile application 5.7mm high.
2. Accept 0.64mm square pin.
3. Tuning-fork type contacts designed for low cost.
4. Mate with pin header such as 2202,2205,2100 & 2204D series.
5. RoHS compliant.

## SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator Resistance: 1000 Megohms min.  
 Contact Resistance: 20 m ohm Max.  
 Dielectric Withstanding: AC 1000 V  
 Operating Temperature: -40°C to +105°C  
 Contact Material: Copper Alloy  
 Insulator Material: PBT, UL 94V-0, Black

Recommended P.C.Board  
Hole Layout

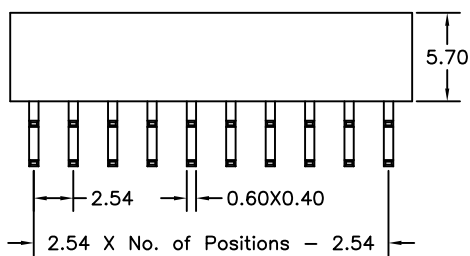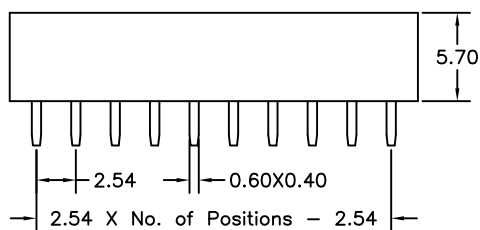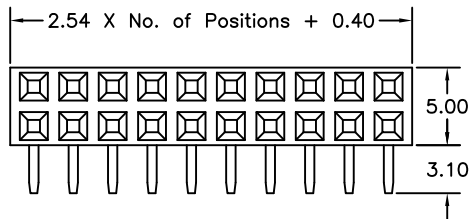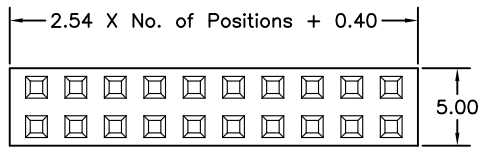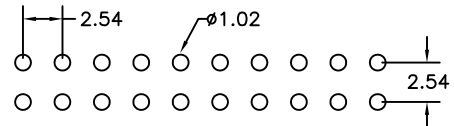

Tolerance: ±0.30mm

## Order Information 2222 Series

Example: 2222-34-S-02-2.85

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2222	08 to 80 Contacts	Straight S	Tin Plated 01	S-B R-B
		Right Angle R	Gold Plated Flash 02	2.85 3.1
			10 μ" 10	
			30 μ" 30	