

2.54mm (0.1") Female Header

Dual Beam Folded Type

(Dual Row, Straight)

2223 Series





APPLICATION AND FEATURES

1. For low profile application 5.0mm high.
2. Designed for parallel and vertical board stacking.
3. Dual-beam folded contact and low insertion force.
4. Standoffs facilitate post soldering clean.
5. Mate with pin header such as 2202, 2205, 2100 & 2204D series.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	30 m ohm Max.
Dielectric Withstanding:	AC 1000 V
Operating Temperature:	-40°C to +105°C
Contact Material:	Copper Alloy
Insulator Material:	Nylon 6T, UL 94V-0

Recommended P.C.Board
Hole Layout

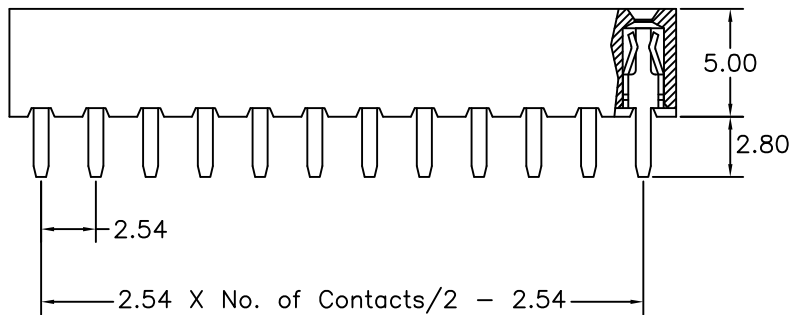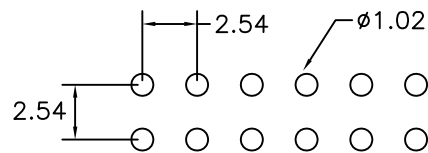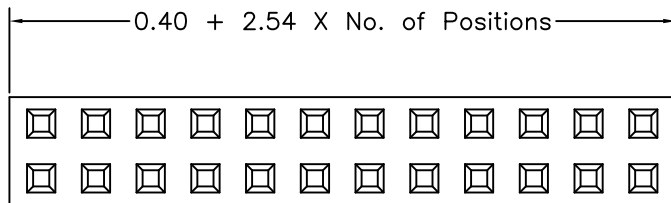

Tolerance: $\pm 0.30\text{mm}$

Order Information 2223 Series

Example: 2223 - 34 - S - 02

Series No.	Number of Contacts	Connector Type	Contact Plating
2223	06 to 80 Contacts	Straight	S
			Tin Plated 01
			Gold Plated
			Flash 02
			10 μ " 10
			30 μ " 30