

2.54mm (0.1") Female Header

(Dual Row, Straight)

2230 Series





APPLICATION AND FEATURES

1. For profile application 7.1mm high.
2. Accept 0.64mm square pin with closed entry.
3. Mate with pin header such as 2202, 2205, 2100 & 2204D series.
4. RoHS compliant.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator Resistance:	5000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	AC 1000 V
Operating Temperature:	-40°C to +105°C
Contact Material:	Phosphor bronze
Insulator Material:	High Temperature Thermoplastic, UL 94V-0

Recommended P.C.Board Hole Layout

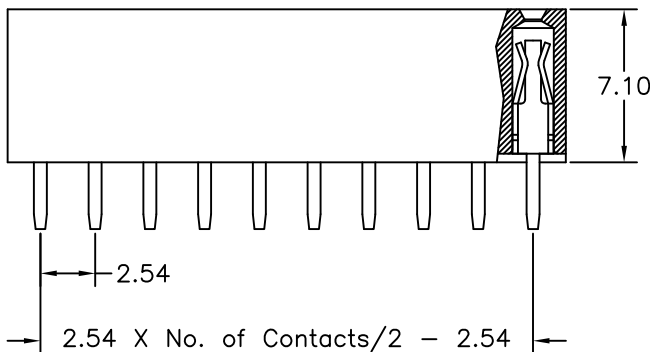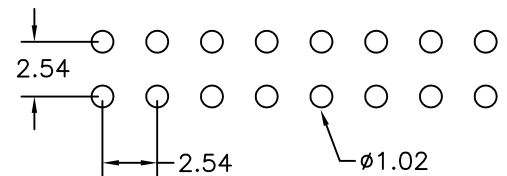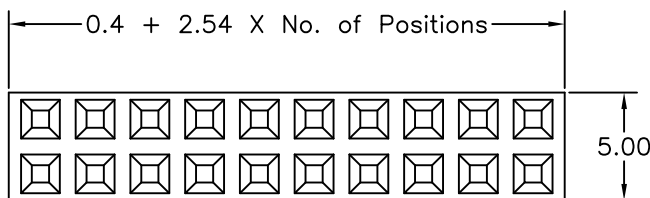

Tolerance: ± 0.30 mm

Order Information 2230 Series

Example: 2230 - 20 - S - 02

Series No.	Number of Contacts	Connector Type	Contact Plating
2230	08 to 80 Contacts	Straight S	Tin Plated 01
			Gold Plated
			Flash 02
			10 μ " 10
			30 μ " 30