

2.54mm (0.1") Female Header

2.54mm x 7.87mm (0.1" x 0.31") Pitch

(Dual Row)

2232 Series

APPLICATION AND FEATURES




1. High reliable dual-beam phosphor bronze contact.
2. Designed for right-angle P.C.Board mounting.
3. Pin stop to prevent shorting circuits between rows.
4. Mate with pin header such as 2202, 2205, 2100 & 2204D series.
5. RoHS compliant.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator Resistance:	1000 Megohms min.
Contact Resistance:	20 m ohm Max.
Dielectric Withstanding:	600V AC/DC
Operating Temperature:	-40°C to +105°C
Contact Material:	Phosphor bronze
Insulator Material:	Nylon 6T, UL 94V-0, Black



Recommended P.C.Board Hole Layout

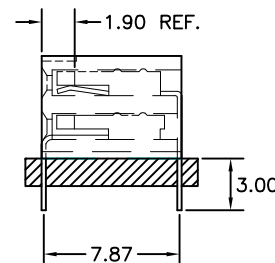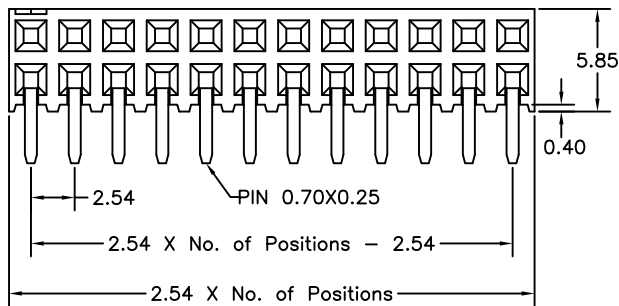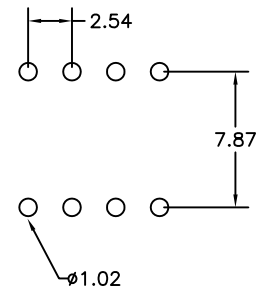

Tolerance: ± 0.30 mm

Order Information 2232 Series

Example: 2232 - 34 - R - 02

Series No.	Number of Contacts	Connector Type	Contact Plating
2232	04 to 80 Contacts	Right angle R	Tin Plated 01
			Gold Plated
			Flash 02
			10 μ " 10
			30 μ " 30