

2.54mm (0.1") Female Header

(Double Row 6.8mm Base)


2234 Series

APPLICATION AND FEATURES




1. For profile application 6.8mm high.
2. Accept 0.64mm square pin with closed entry.
3. Dual beam box Type contacts.
4. Mate with pin header such as 2202, 2204D, 2100 & 2205 series.
5. RoHS compliant.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator resistance: 1000 Megohms min.
 Contact resistance: 20 m ohm Max.
 Dielectric withstanding: 600V AC/DC
 Operating Temperature: -40°C to +105°C
 Contact Material: Phosphor bronze
 Insulator Material: Polyester, UL 94V-0
 ©Standard: P.B.T

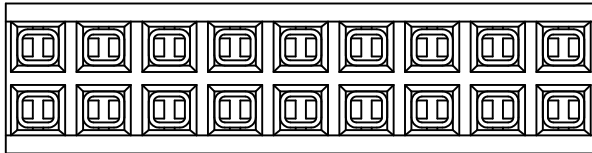

Recommended P.C.Board
Hole Layout

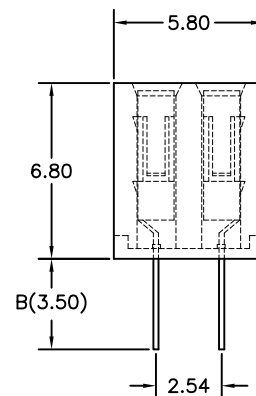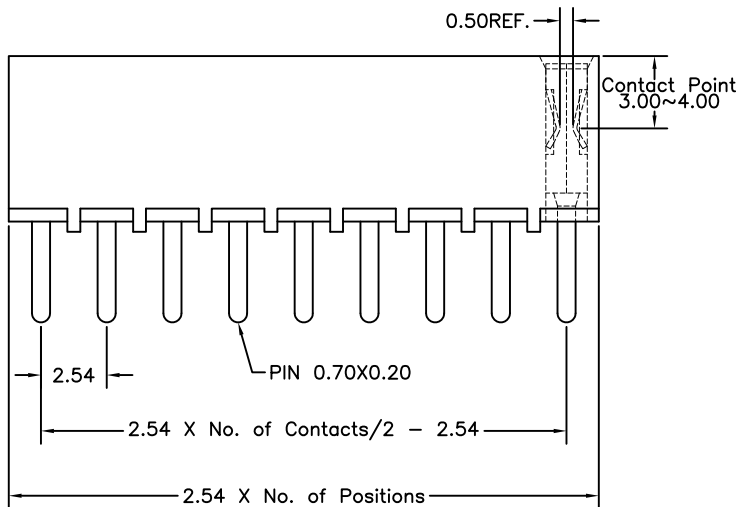

Order Information 2234 Series

Example: 2234 - 34 - S - 02 - 3.5 - G

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2234	06 to 80 Contacts	Straight S	Tin Plated 01	B
			Gold Plated	3.5
			Flash 02	1.2
			10 μ" 10	
			30 μ" 30	