

2.54mm (0.1") Female Header

(Double Row)

2235 Series


APPLICATION AND FEATURES

1. For standard profile application 8.5mm high.
2. Accept 0.64mm square pin.
3. Mate with pin header such as 2301, 2302, 2303 series.
4. RoHS compliant.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min.
 Contact Resistance: 20 m ohm Max.
 Dielectric Withstanding: 500V AC/DC
 Operating Temperature: -25°C to +85°C
 Contact Material: Phosphor bronze
 Insulator Material: Polyester, UL 94V-0
 © Standard: P.B.T

Recommended P.C.Board
Hole Layout

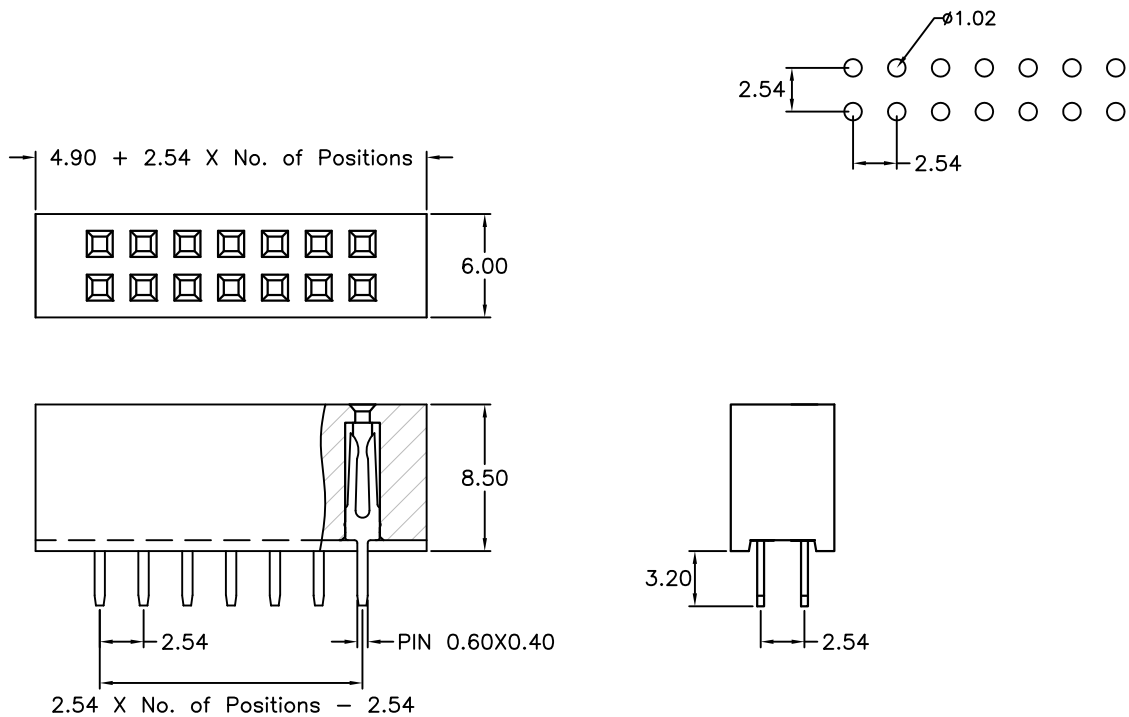

Tolerance: $\pm 0.30\text{mm}$

Order Information 2235 Series

Example: 2235 - 20 - S - 02 - 3.2 - 0 | 0:W/O Polarization Bump

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2235	04 to 80 Contacts	Straight S	Tin Plated 01	S-B
			Gold Plated	3.2
			Flash 02	
			10 μ " 10	
			30 μ " 30	