

# 2.54mm (0.1") Female Header

*Polarization Bump  
(Double Row)*


*2235H-HT Series*

## APPLICATION AND FEATURES

1. For standard profile application 8.5mm high.
2. Accept 0.64mm square pin.
3. Mate with pin header such as 2301, 2302, 2303 series.
4. RoHS compliant.

## SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator Resistance: 1000 Megohms min.  
 Contact Resistance: 30 m ohm Max.  
 Dielectric Withstanding: AC 1000 V  
 Operating Temperature: -55°C to +105°C  
 Contact Material: Copper Alloy  
 Insulator Material: Nylon 6T, UL 94V-0

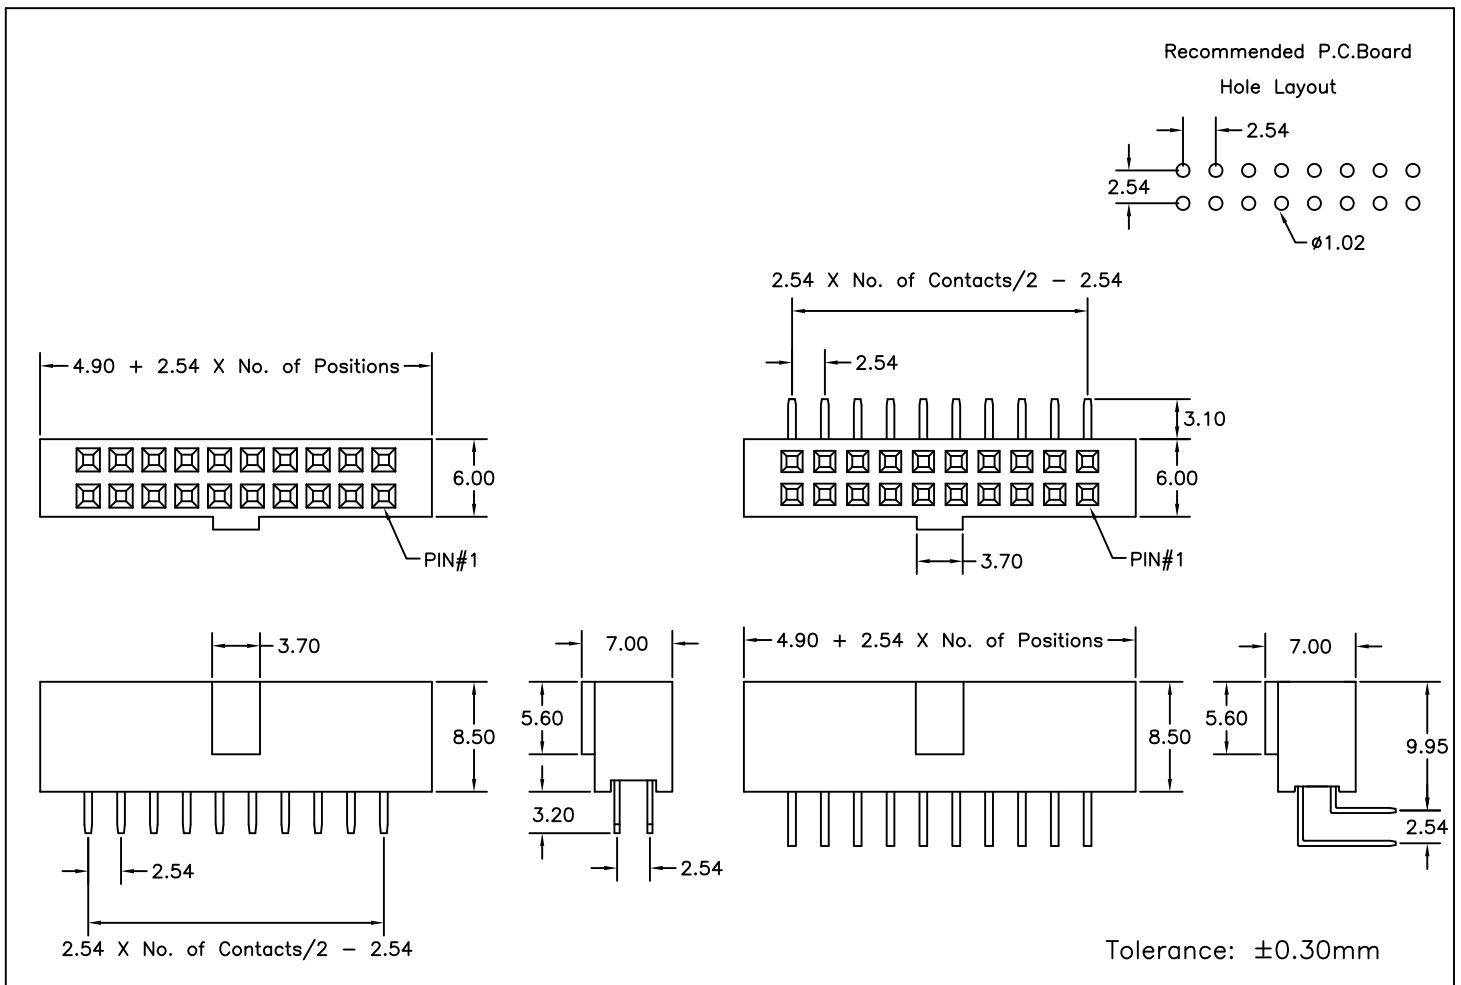

## Order Information 2235H Series

Example: 2235H-20-S-02-3.2-1-HT

with Polarization Bump

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2235H	08,10,12,14,16,18,20, 24,26,28,30,34,36,40 50,68	Straight <input type="checkbox"/> S Right Angle <input type="checkbox"/> R	Tin Plated <input type="checkbox"/> 01 Gold Plated <input type="checkbox"/> 02 Flash <input type="checkbox"/> 10 10 μ" <input type="checkbox"/> 10 30 μ" <input type="checkbox"/> 30	S-B <input type="checkbox"/> 3.2 R-B <input type="checkbox"/> 3.1