

2.54mm (0.1") Female Header

(Triple Row 8.5mm Base)

2238 Series





APPLICATION AND FEATURES

1. For standard profile application 8.5mm high.
2. Accept 0.64mm square pin with closed entry.
3. Tuning-fork type contacts designed for low cost.
4. Different foot length for customer design choice.
5. Mate with pin header such as 2203 series.
6. RoHS compliant.

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Contact Resistance: 30 m ohm Max.
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: -40°C to +105°C
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 ©Standard: PBT

Recommended P.C.Board
Hole Layout

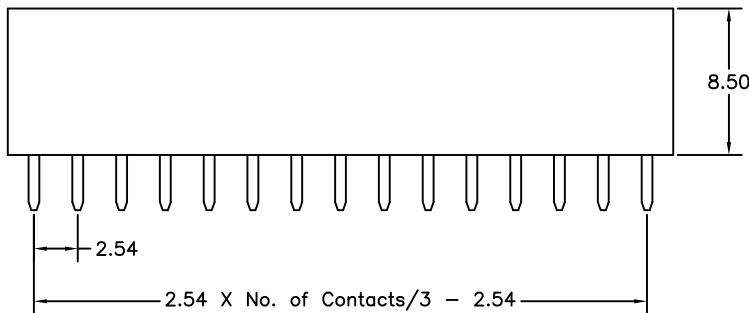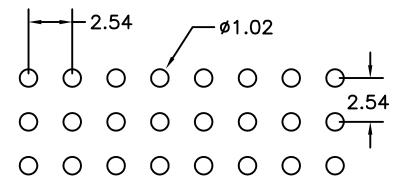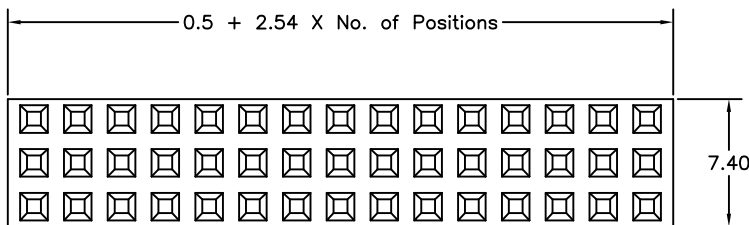

Tolerance: $\pm 0.30\text{mm}$

Order Information 2238 Series

Example: 2238-34-S-02-3.2

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2238	09 to 120 Contacts	Straight S	Tin Plated 01	S-B
			Gold Plated Flash 02	3.2
			10 μ " 10	
			30 μ " 30	