

# 2.54mm (0.1") Elevated Female Header

(Single Row)



2711N Series

## APPLICATION AND FEATURES

1. Suggestion mating with 2201, 2204S & 2812 series.
2. RoHS compliant.

## SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 1000 Megohms Min.  
 Contact resistance: 20 Megohms Max.  
 Dielectric withstanding: 600V AC/DC  
 Operating Temperature: -40°C to +105°C  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 ©Standard: P.B.T

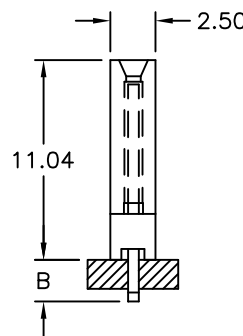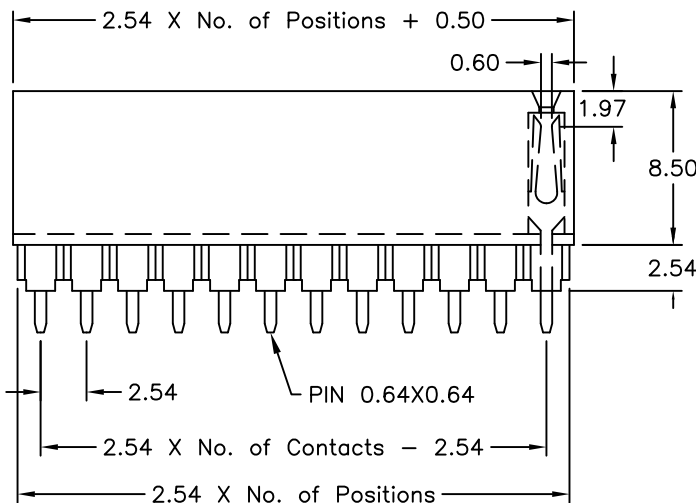

Recommended P.C.Board Hole Layout



## Order Information 2711N Series

Example: 2711N-40-02-B-G

Series No.	Number of Contacts	Contact Plating	Pin Length mm
2711N	02 to 40 Contacts	Tin Plated 01	B
		Gold Plated	2.30 1W
		Flash 02	7.40 1Y
		10 μ" 10	12.20 1Z
		30 μ" 30	