


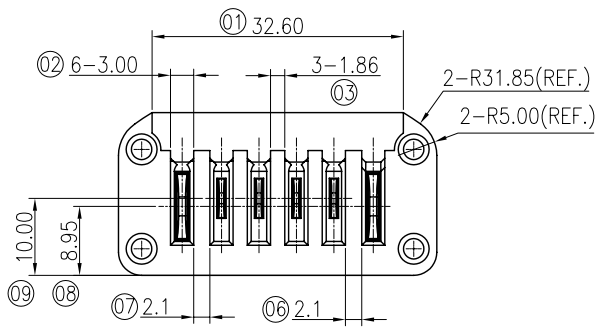






REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JunKang	2018.11.05

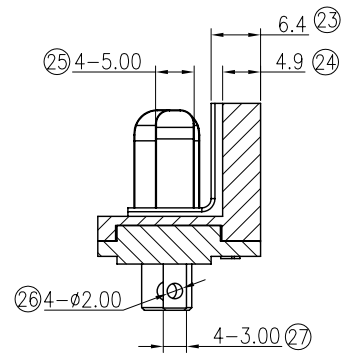

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING CURRENT: 30A
 - RATING VOLTAGE: 220V AC.
 - CONTACT RESISTANCE: 30mΩ(INITIAL), 50mΩ(AFTER LIFE TEST)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 1,000MΩ MIN. AT 500 VDC
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 6N~60N.
 - WITHDRAWAL FORCE: 6N~60N.
 - LIFE TEST: 5,000 CYCLES.
 - ENVIRONMENTAL CHARACTERISTICS:
 - OPERATING TEMPERATURE: -30°~+80°
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - RoHS COMPLIANT PRODUCT.
 - HALOGEN FREE PRODUCT IDENTIFICATION MARK: Ⓢ
 - HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 - OTHER GENERAL SPEC. TO REFER "2BA205X SERIES SPEC"
 - FAI NO. MARK: Ⓣ
 - PACKAGING: TRAY.

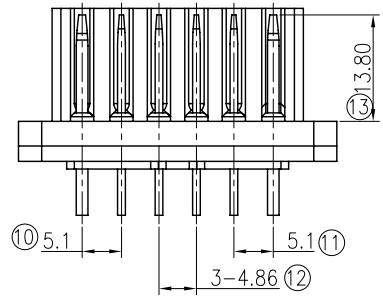

SECTION A-A

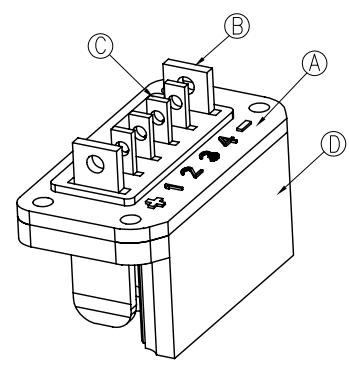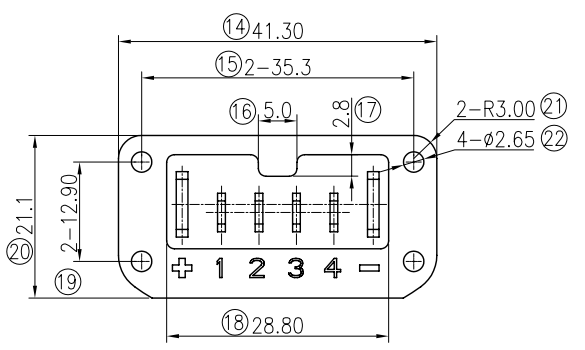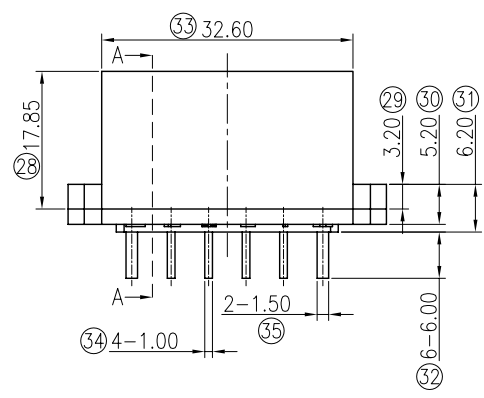

NO.	DESCRIPTION	QTY.	MATERIAL	PLATING & COLOR
A	BODY	1	PBT+15%GF, UL94 V-0	BLACK
B	TERMINAL-A	2	BRASS 1.5T	NICKEL PLATING
C	TERMINAL-B	4	BRASS 1.0T	
D	RUBBER	1	SILICONE 50P	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS: X :±1.00 X.X :±0.50 X.XX :±0.30 X.XXX :±0.20		TITILE BATTERY CONNECTOR 90 ANGLE PLUG DWN JunKang-Zhong 18/11/6 PART NO.: 2BA2053-W06M00F CHKD G/Cai-Hu 18/11/6 SCALE: 1:1 UNIT: mm APVD Jim-deng 18/11/6 SIZE: A3 SHEET: 10F1 REV: A	
CUSTOMER COPY			