
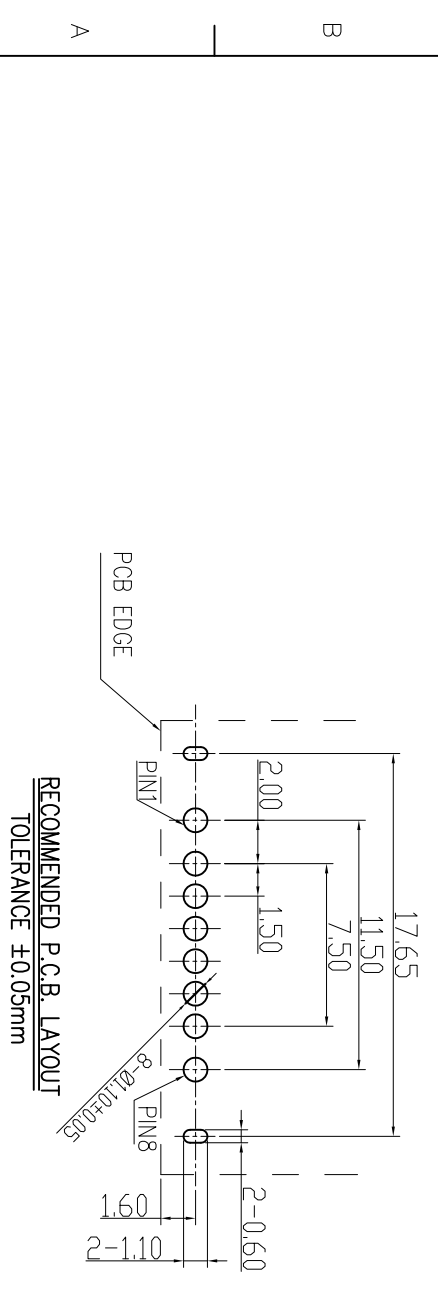


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A		INITIAL RELEASE	LY	2013.07.04

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 30V, 7A MAX.
 - CONTACT RESISTANCE: 20 MILLIOHMS MAX. FOR INITIAL.
 - INSULATION RESISTANCE: 100 MEGAOHMS MIN. BY 500V DC AFTER 1 MINUTE.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V RMS AFTER 1 MINUTE.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.12~1.8 KGF
 - WITHDRAWAL FORCE : 0.10~1.5 KGF
- LIFE TEST: 5,000 CYCLES MIN.
- TEMPERATURE RANGE: -40~+85°C
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:

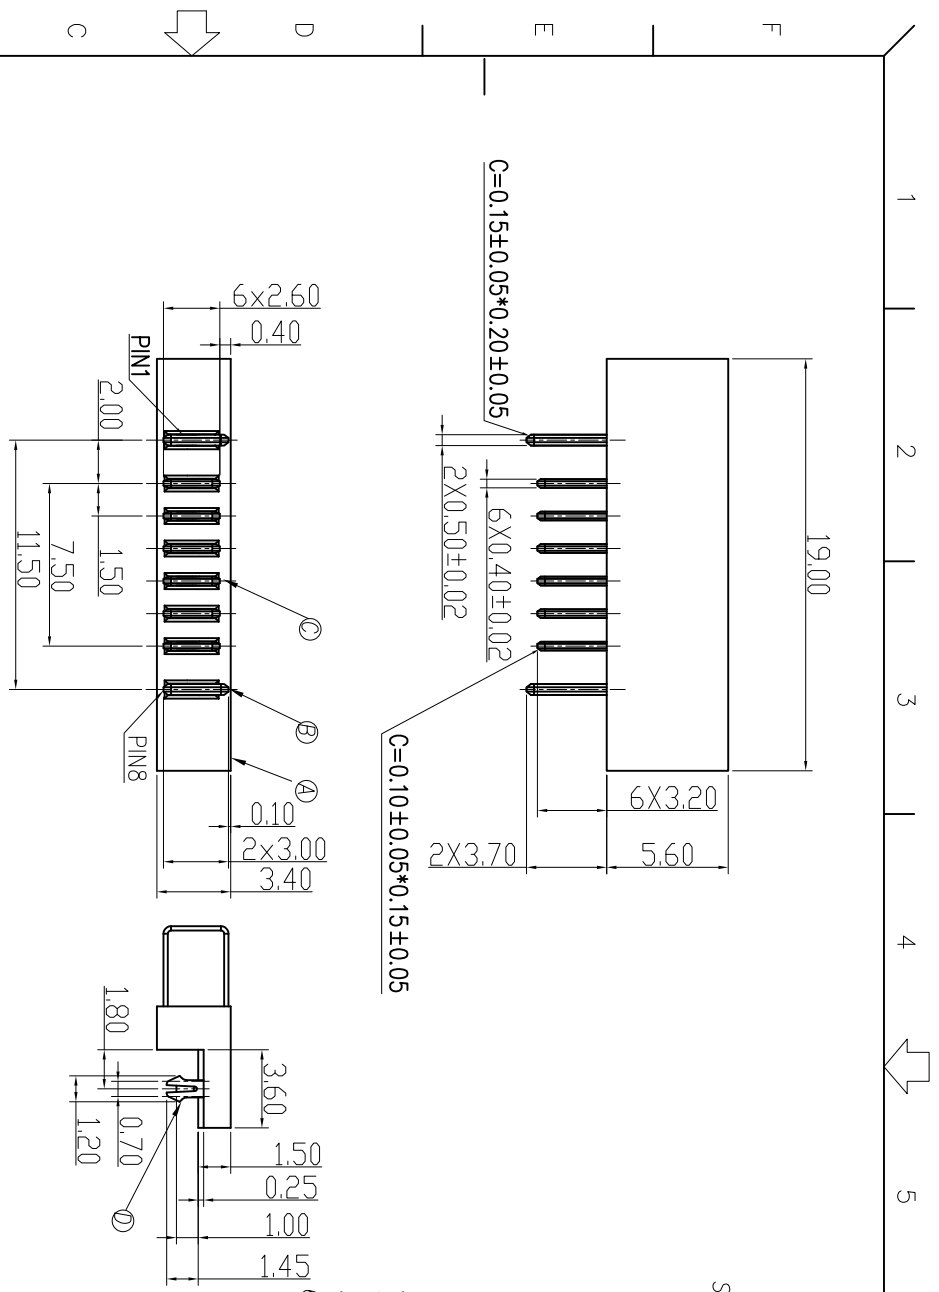

E	CAP	1	HIGH THERMOPLASTIC UL 94V-0	BLACK COLOR
D	HOOK	2	COPPER ALLOY	Sn PLATING OVER NICKEL
C	TERMINAL 2	6	COPPER ALLOY	GOLD FLASH PLATING OVER NICKEL
B	TERMINAL 1	2	COPPER ALLOY	GOLD FLASH PLATING OVER NICKEL
A	HOUSING	1	HIGH THERMOPLASTIC UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信亨企業股份有限公司				
TITLE: 8P BATTERY CONN				
DMN	LY	PART NO.	2BA2Y13-000008F	
CHKD	KIM	SCALEN/A	UNIT: mm	
APVD	SEAN	SIZE: A4	SHEET: 10F1	REV: A
CUSTOMER COPY				