REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO. T200610-3A	Jie	2021.1.28

Key Dimension
1.Effective contact stoke of shrapnel in working state:0.5mm Min.
2.GAP 0.5mm

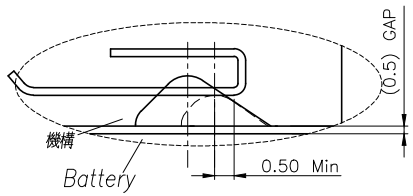

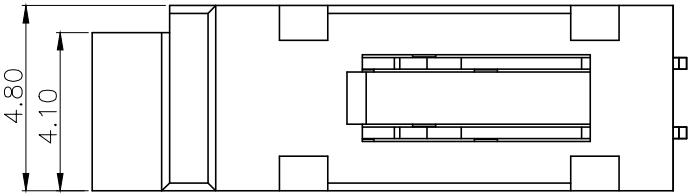

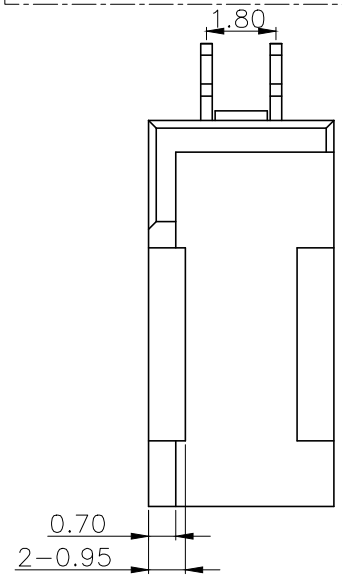

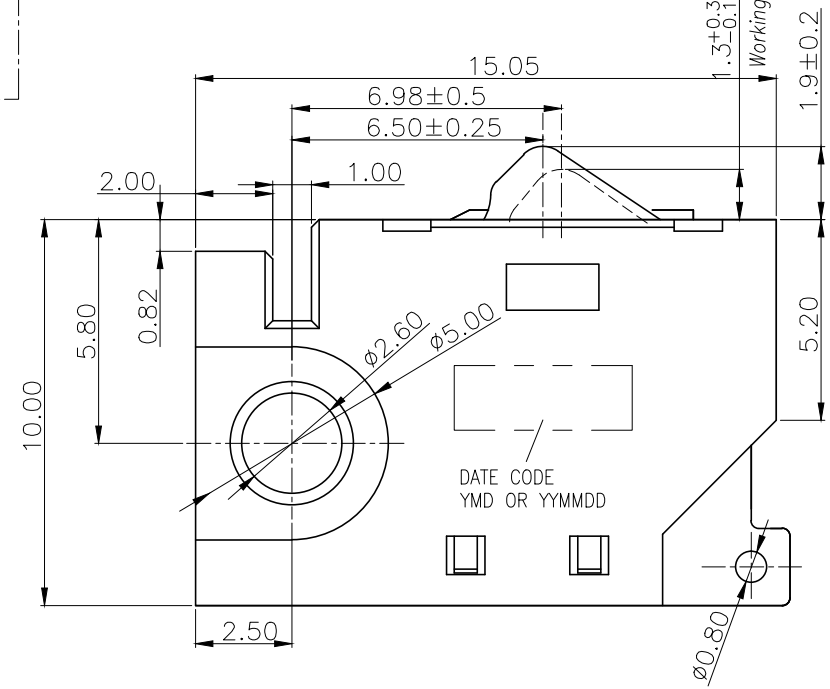

NOTES:
1. ELECTRICAL PERFORMANCES:
   1.1 RATING:1A
   1.2 CONTACT RESISTANCE: 50 mΩ MAX.
   1.3 INSULATION RESISTANCE: 100 MΩ MIN.
   1.4 DIELECTRIC WITHSTANDING VOLTAGE : 250V AC MIN. FOR ONE MINUTE.
2. MECHANICAL PERFORMANCES:
   2.1 NORMAL FORCE 80gf (FOR WORKING TRAVEL 0.6mm)
   2.2 MECHANICAL OPERATION: 10000 CYCLES.
   2.3 OPERATING TEMPERATURE: -40°C TO 85°C.
3. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: ◎
4. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
5. TO CONFORM TO THE SINGATRON HSF SPECIFICATION.

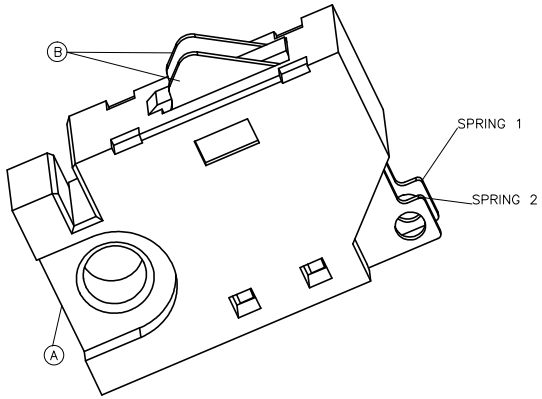



SCALE: 1:2
REMOVE CAP BEFORE ASSEMBLY

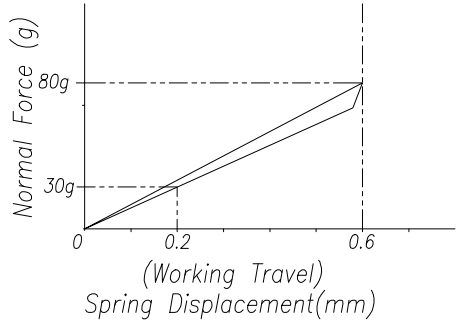

C	CAP	1	STAINESS, T=0.2	CLEAN
B	SPRING	2	COPPY ALLOY T=0.3	GOLD FLASH OVER Ni 60u"
A	BODY	1	THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: X :±0.5, X.X :±0.3, X.XX :±0.2
ANGLES: X :±2°, X.X :±1°

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	STYLUE PEN CHARGER			
DWN	Jie	PART NO. 2BA3071-022111F		
CHKD	Lussen	SCALE: --	UNIT: mm	
APVD	Liao	SIZE: A3	SHEET:1 OF 1	REV: A

CUSTOMER COPY