

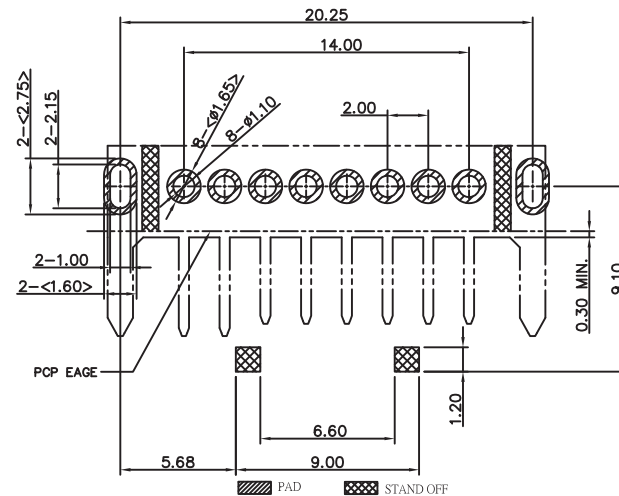


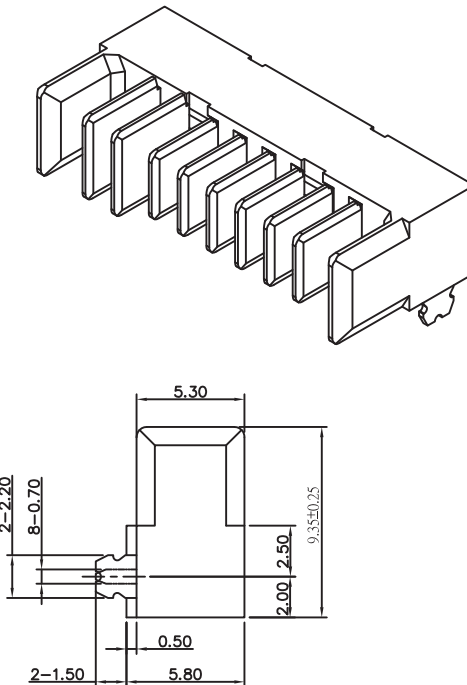

RoHS
Compliant

HSF

工程變更單號 ECN NO.	版本 REV	日期 DATE	描述 DESCRIPTION
SZ2016-0061	0	16/11/28	正式圖面

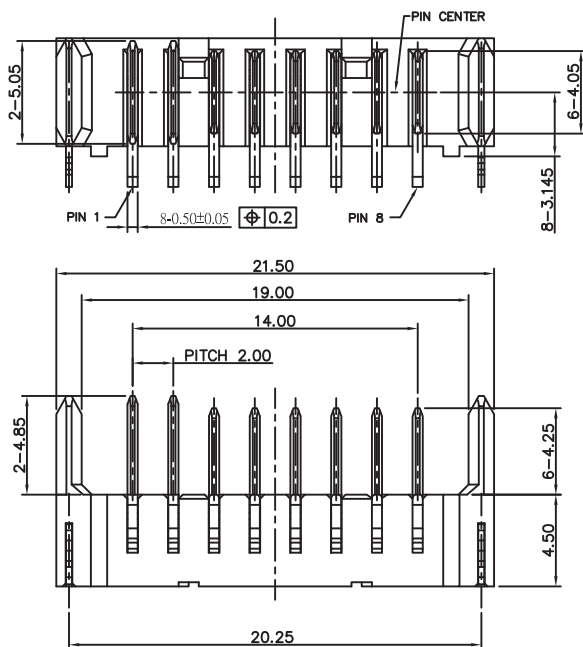

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
P.C.B THICKNESS=1.20mm (TOLERANCE=±0.05)

NOTES.

1. FINISH

- 1.1 CONTACT AREA :
GOLD PLATING ON (SEE NOTES, NO.8 DESCRIPTION) , 50u" NICKEL PLATING OVERALL
- 1.2 SOLDER AREA :
100u" MIN. MATTE TIN ON , UNDER 50u" NICKEL PLATING OVERALL
- 1.3 FORK LOCK :
100u" MIN. MATTE TIN ON , UNDER 50u" NICKEL PLATING OVERALL

2. ELECTRICAL

- 2.1 CURRENT RATING: 7.0A PER PIN MAX.
- 2.2 VOLTAGE RATING: 50V DC
- 2.3 CONTACT RESISTANCE: 30mΩ MAX (INITIAL)
- 2.4 INSULATION RESISTANCE: 1000MΩ MIN (INITIAL)
- 2.5 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC.

3. LIFE TEST: 5,000 CYCLES.

4. UNLESS OTHERWISE SPECIFIED TOLERANCE:AS SHOW AS GENERAL TOLERANCE

5. DIMENSIONS MARKED < > EXPRESSING REFERENCE.

6. ENVIRONMENTAL:OPERATION TEMPERATURE:-40C°~+85C°


7. PRODUCT COMPLIANT TO ROHS AND HALOGEN FREE.

8. PRODUCT NO. : 2BAPTJ-08KVBR Z B

CONTACT AREA PLATING DESCRIPTION

Z : 5 μ" MIN GOLD OVER 25 μ" MIN 80/20 Pd/Ni ON CONTACT AREA. , G/F PLATING ON SOLDER AREA.
NICKEL UNDERPLATED 50 μ" MIN. OVER ALL..

WITH CAP DRAWING VIEW

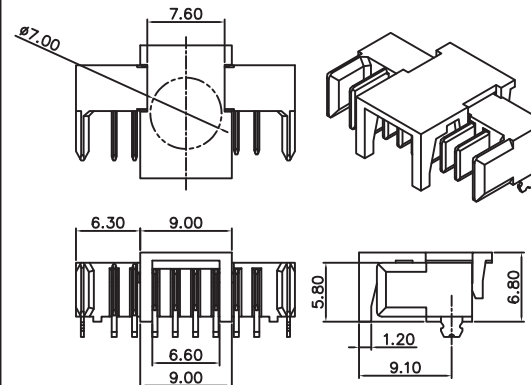

General	Angle
X±0.30	X'±5°
.X±0.20	.X'±3°
.XX±0.10	.XX'±2°
.XXX±0.08	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	

Singatron Enterprise Co., Ltd.

TITLE	8 PIN 2.00 PITCH MALE BATTERY CONNECTOR		
DWN	黃正茂 16/11/28	PART NO.	2BAPTJ-08KVBRZB
CHKD	蔡佳謬 16/11/28	SCALE 1:1	UNIT: mm
APVD	蔡佳謬 16/11/28	SIZE: A3	SHEET:1 OF 3

REV: C

CUSTOMER COPY



NO.	DESCRIPTION	QTY.	MATERIAL	FINISH	REMARKS
3	FORK LOCK	2	IRON ALLOY	---	T=0.30MM
2	TERMINAL	8	COPPER ALLOY	---	T=0.50MM
1	HOUSING	2	THERMOPLASTIC	Black	UL94V-0



RoHS
Compliant

HSF

工程變更單號 ECN NO.	版本 REV	日期 DATE	描述 DESCRIPTION
SZ2016-0061	0	16/11/28	正式圖面

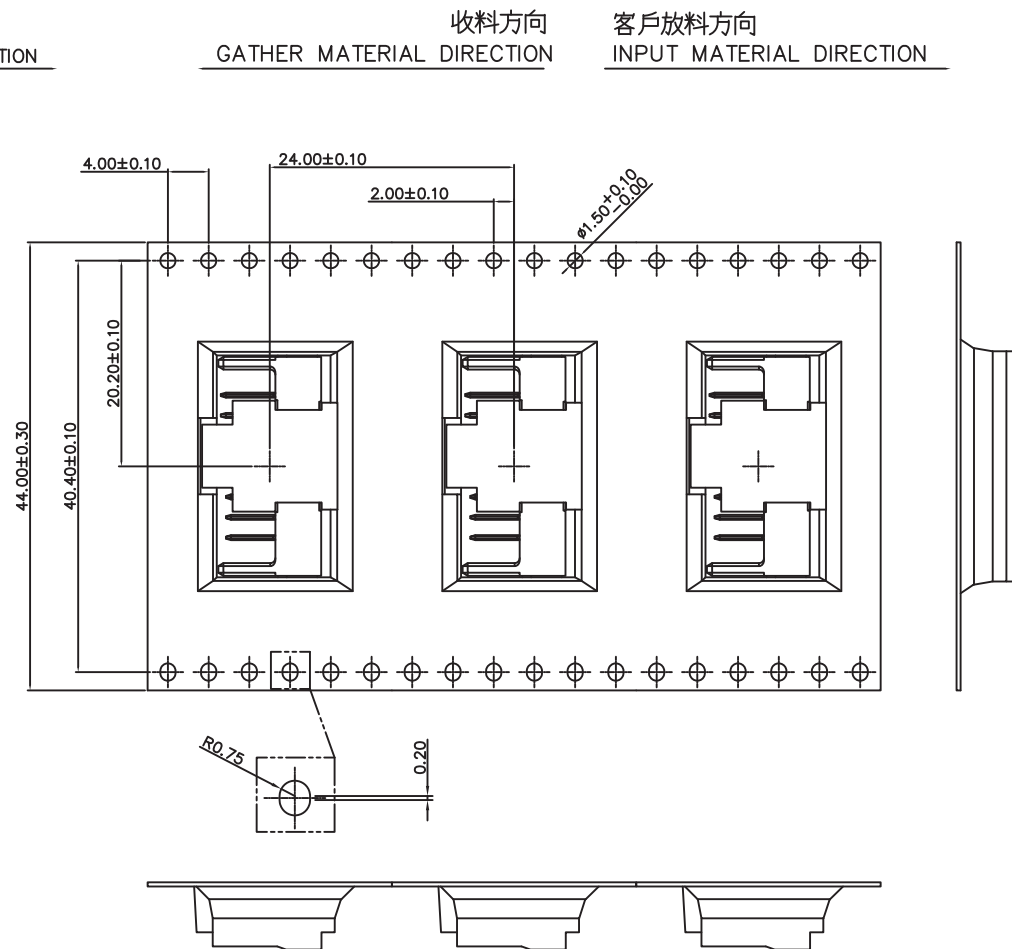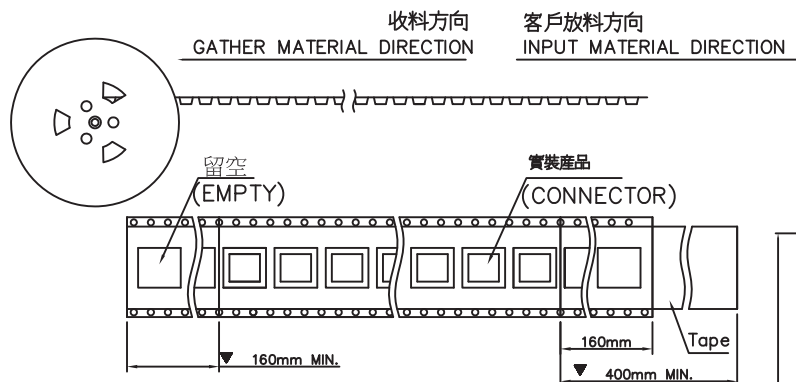

NOTE:

1. 未標註公差尺寸參照 GENERAL TOLERANCE。
2. 包裝盤使用 13" REEL，料號：-----。
3. TAPE帶料號：TABTJ170000
4. COVER料號：COVER44L000
- ▼ 5. 包裝時注意產品放置方向，且產品不可有反向及傾倒之狀況產生。
6. 包裝時特別注意前後預留空白長度。
7. 包裝產品資訊

PART NUMBER	Q'TY PER REEL
2BABTJ-08KVBRZB	400 PCS

General	Angle
X±0.30	X'±5°
.X±0.20	.X'±3°
.XX±0.10	.XX'±2°
.XXX±0.08	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	

Singatron Enterprise Co., Ltd.

TITLE	8 PIN 2.00 PITCH MALE BATTERY CONNECTOR		
DWN	黃正茂 16/11/28	PART NO.	2BABTJ-08KVBRZB
CHKD	蔡佳謬 16/11/28	SCALE	1:1
APVD	蔡佳謬 16/11/28	UNIT:	mm
		SIZE:	A3
		SHEET:	2 OF 3
		REV:	C

CUSTOMER COPY




RoHS
Compliant


HSF

工程變更單號 ECN NO.	版本 REV	日期 DATE	描述 DESCRIPTION
SZ2016-0061	0	16/11/28	正式圖面

Reel 盤
(RExxxx)



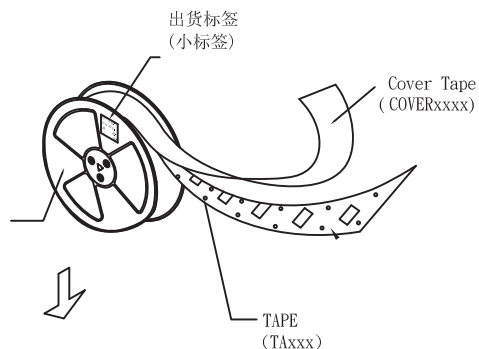


將PE袋封口後用
膠帶十字纏繞一次



包裝方式:

1. 將REEL盤(8盤)裝入PE袋中,所有小標籤朝上,裝完後用膠帶十字纏繞一次固定。
2. 將氣泡布及四個角柱讓入紙箱,放置前確認紙箱四周確實用封箱膠帶補強。
3. 將打包好的REEL盤放入紙箱,並於上層放置氣泡布。
4. 膠帶封箱,封箱方式參照圖示,封箱後在外箱左上角貼上出貨大標籤,右下角貼上QC顏色標籤。
6. 尾箱出貨時,需用填充物(內箱,紙板,泡棉等)填充。

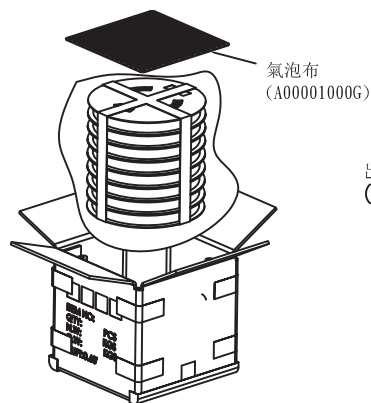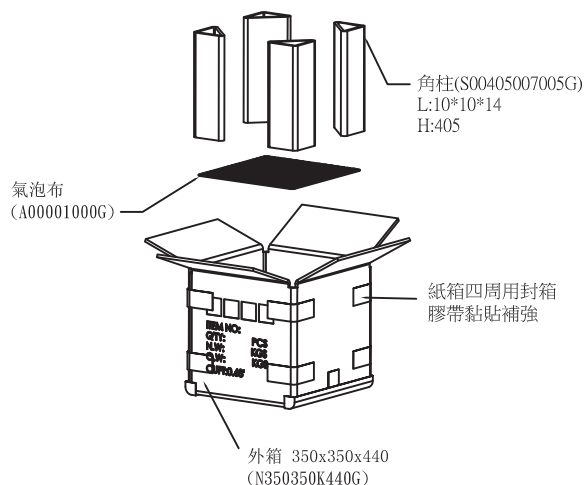

包裝資訊

產品料號	每盤包裝數量	每箱包裝盤數	每箱產品數量
2BABTJ-08KVBRZB	400 PCS	8 R	3200 PCS
	每盤重量	每箱淨重 N.W.	每箱毛重 G.W.
	----- g	----- g	----- g

General		Angle		Singatron Enterprise Co., Ltd.			
X±0.30		X°±5°		8 PIN 2.00 PITCH MALE BATTERY CONNECTOR			
.X±0.20		.X°±3°					
.XX±0.10		.XX°±2°		TITLE			
.XXX±0.08		<div></div>		DWN黃正茂 16/11/28PART NO. 2BABTJ-08KVBRZB			
				CHKD蔡佳謬 16/11/28SCALE 1:1UNIT: mm			
				APVD蔡佳謬 16/11/28SIZE: A3SHEET: 3 OF 3REV: C			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED				CUSTOMER COPY			