

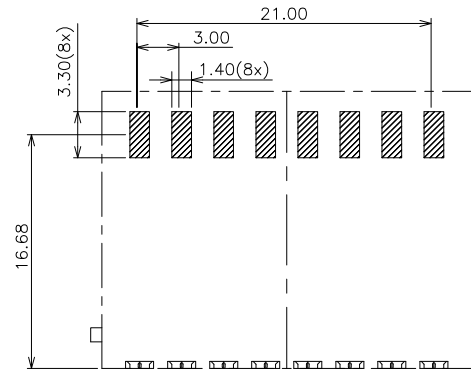
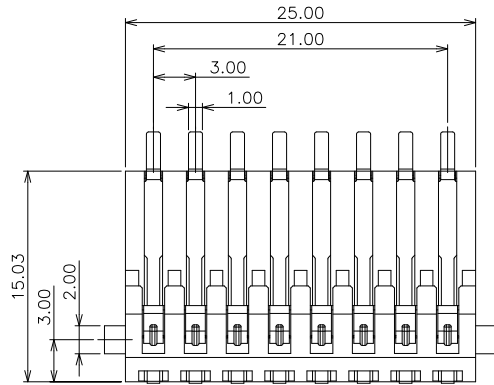


GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			Initial	2015/12/28	Phebe Su
A1			Change	2022/04/23	Hanson
A2			Change DIM.	2022/05/12	Hanson

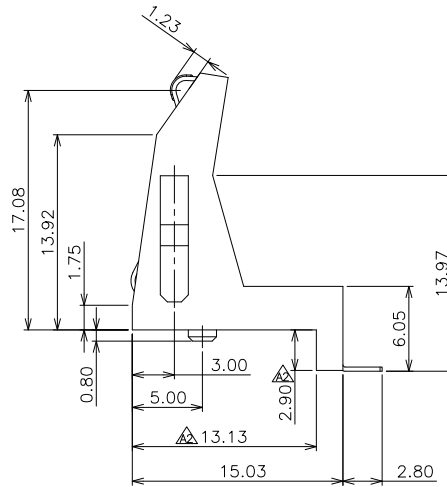


PCB LAYOUT

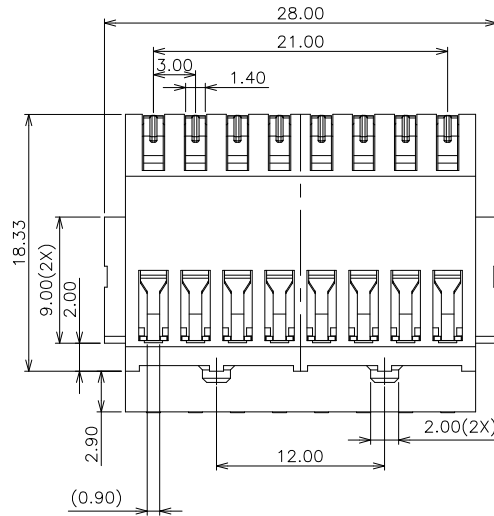

NOTES.

- ELECTRICAL
 - CURRENT RATING:3.0A PER PIN MAX.
 - CONTACT RESISTANCE: 35m OHM MIN.
 - INSULATION RESISTANCE: 1000M OHM MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE:20VAC.
- MATERIALS
 - HOUSING: HIGH TEMPERATURE POLYESTER,UL 94V-0. BLACK
 - TERMINAL: COPPER ALLOY .
- UNLESS OTHERWISE SPECIFIED TOLERANCE:AS SHOW
AS GENERAL TOLERANCE
- LIFE TEST:15000CYCLES.
- OPERATION TEMPERATURE:-40C°~+85C°
- PRODUCT COMPLIANT TO ROHS AND HALOGEN FREE.

PART NO:

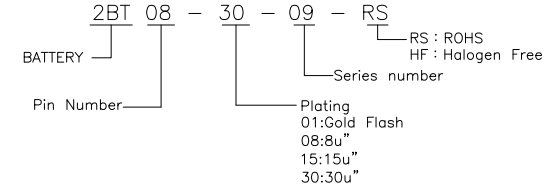

TOLERANCE:	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
ANGLE:	±3°

Singatron Enterprise Co., Ltd.				
TITLE	BATTERY R/A SMT TYPE			
DWN	Hanson Huang	PART NO.	2BT08-30-09-RS	
CHKD	2022/05/12	SCALE	1:1	UNIT: mm
APVD	Richard Hsieh	SIZE:	A3	SHEET: 1 OF 1 REV: A2
CUSTOMER COPY				