

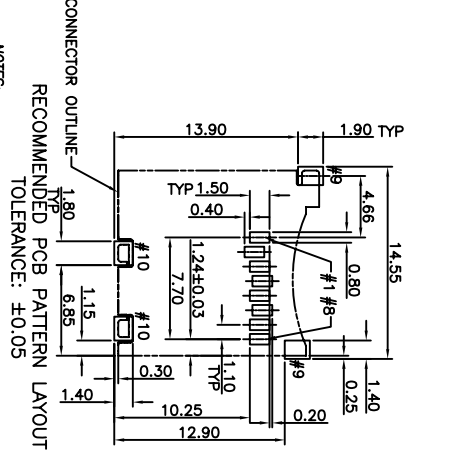
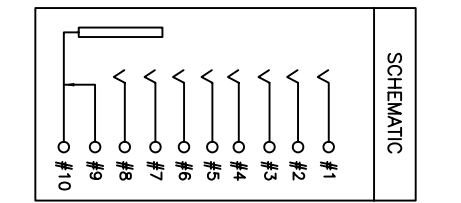
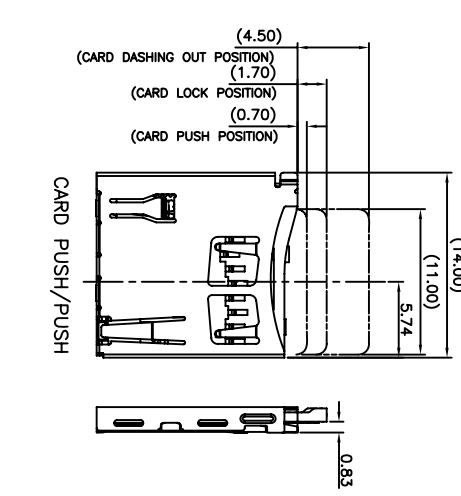
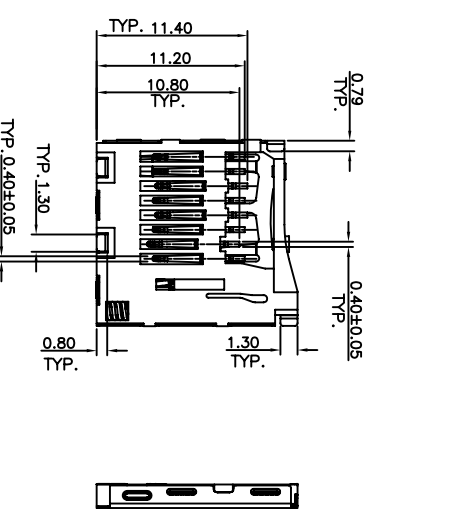


REV. ECN NO OR DESCRIPTION	REVISED	DATE
A INITIAL RELEASE	孫一中	2009.09.04



NOTES:
 1. MATERIAL : HOUSING:HIGH TEMPERATURE THERMOPLASTIC. U:94V-0-BLACK
 SLIDE:HIGH TEMPERATURE THERMOPLASTIC. U:94V-0-BLACK
 SHELL:STAINLESS STEEL.
 CONTACT:COPPER ALLOY.
 DETECT PIN: COPPER ALLOY.
 LOCK PIN:STAINLESS STEEL.
 2. PLATED : CONTACT:20u" Min. Au PLATING IN CONTACT AREA;
 1~3u" Min Au PLATED OVERALL.
 50u" Ni UNDERPLATED OVERALL.
 DETECT PIN:1u" Min. Au PLATED OVER ALL.
 50u" Min. Ni UNDERPLATED OVERALL .
 3.ELECTRICAL CHARACTERISTIC:
 CONNECT RESISTANCE:40 MILLIONMS/PIN Max.
 INSULATION RESISTANCE:1000 MEGAOHMS Min.
 VOLTAGE WITHSTAND:500V AC for 1minute
 4.MECHANICAL CHARACTERISTIC:
 CONTACT MATING FORCE:3kgf Max.
 CONTACT UNMATING FORCE:100gf Min.
 DURABILITY:5000 CYCLES
 5. SOLDER HEAT RESISTANCE:REFLOW SOLDERING 260° FOR 10 SEC.
 6. TO CONFORM TO SINGAPORE HAZARDOUS SUBSTANCE FREE SPEC.
 7. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT.
 8. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKING.
 9. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
 10. PRINTED DATE CODE:YYMMDD * ON TOP OF CONNECTOR.

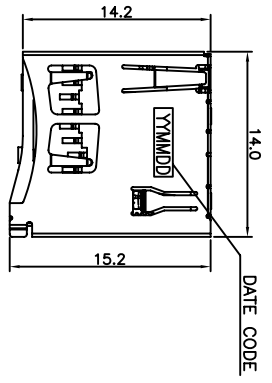

RELATION OF SWITCHES TO TRANS-FLASH CARD ATTACHMENT CONDITION	
CARD ATTACHMENT CONDITION	CARD DETECT SWITCH
CARD NOT ATTACHED	CLOSED
CARD ATTACHED	OPEN
SITUATION DEPICTION	
#9
 SHORT	
#9
 OPEN	

Pin No.	Name	Type	DESCRIPTION
1	DAT2	I/O/PP	Data Line [bit2]
2	CD/DAT3	I/O/PP	Card Detect Data Line [bit3]
3	CMD	PP	Command Response
4	VDD	S	Supply Voltage
5	CLK	I	Clock
6	VSS	S	Supply Voltage Ground
7	DAT0	I/O/PP	Data Line [bit0]
8	DAT1	I/O/PP	Data Line [bit1]

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR																				
UNLESS OTHERWISE SPECIFIED TOLERANCES																								
DECIMALS:	ANGLES:																							
±0.5	±2°																							
±0.3	X.X ±1°																							
±0.2	X.XX ±0.2																							
<table border="1"> <tr> <td>TITLE</td> <td>TRANS FLASH PUSH/PUSH TYPE</td> </tr> <tr> <td>DWN</td> <td>孫一中</td> </tr> <tr> <td>CHKD</td> <td>劉木遠</td> </tr> <tr> <td>APVD</td> <td>羅文生</td> </tr> <tr> <td>PART NO.</td> <td>2CA-0005-003</td> </tr> <tr> <td>SCALE</td> <td>2:1</td> </tr> <tr> <td>UNIT:</td> <td>mm</td> </tr> <tr> <td>SIZE:</td> <td>A3</td> </tr> <tr> <td>SHEET:</td> <td>10F1</td> </tr> <tr> <td>REV.</td> <td>A</td> </tr> </table>					TITLE	TRANS FLASH PUSH/PUSH TYPE	DWN	孫一中	CHKD	劉木遠	APVD	羅文生	PART NO.	2CA-0005-003	SCALE	2:1	UNIT:	mm	SIZE:	A3	SHEET:	10F1	REV.	A
TITLE	TRANS FLASH PUSH/PUSH TYPE																							
DWN	孫一中																							
CHKD	劉木遠																							
APVD	羅文生																							
PART NO.	2CA-0005-003																							
SCALE	2:1																							
UNIT:	mm																							
SIZE:	A3																							
SHEET:	10F1																							
REV.	A																							