



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A	PDR NO.:S110718-6C	Shown	2011.08.08

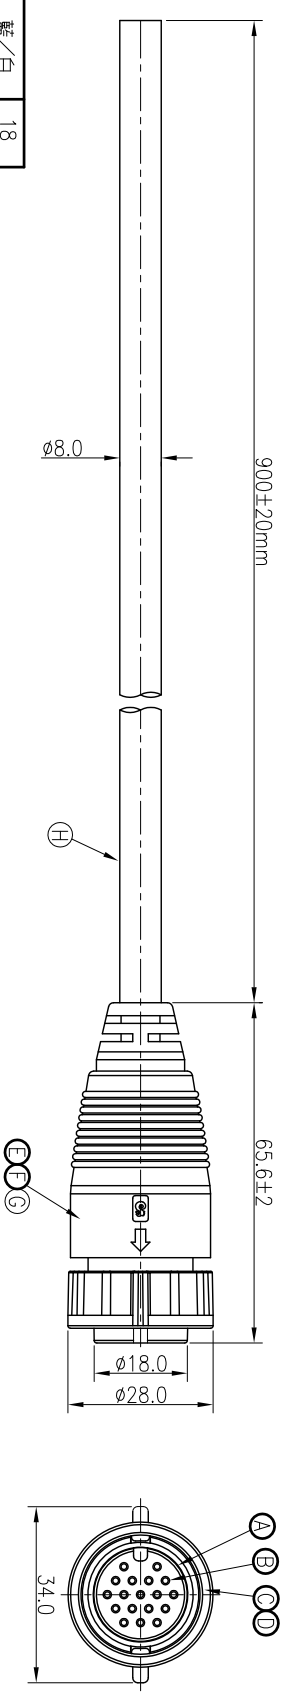

CONN.

WATERPROOF RATE: IP67

BLUE/WHITE	藍/白	18
GREEN/WHITE	綠/白	17
ORANGE/WHITE	橙/白	16
RED/WHITE	紅/白	15
BROWN/WHITE	棕/白	14
BLACK/WHITE	黑/白	13
LIGHT GREEN	淺綠	12
PURPLE	紫	11
ORANGE	橙	10
BLACK	黑	9
RED	紅	8
PINK	粉紅	7
GRAY	灰	6
YELLOW	黃	5
GREEN	綠	4
WHITE	白	3
BLUE	藍	2
BROWN	棕	1
WIRE COLOR		CONN.
		PIN OUT



- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 5A
 3. OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES SPEC."
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GR-PASS**

H	CABLE	1	UL2464 24#*18C+AL JV RESISTANT OD=ø8.0	BLACK(PVC JACKET)
G	SHRINK TUBE	1	125° 300V L=15mm	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	FEMALE PIN	18	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+33%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信益企業股份有限公司

DECIMALS:	ANGLES:	TITLE	CIRCULAR LARGE SIZE (IP67) FEMALE CONN. FEMALE 18 PIN LOCK TYPE
X : ±0.5	X : ±2°	DWN	Shown
X.X : ±0.3	X.X : ±1°	CHKD	Steve
X.XX : ±0.2		APVD	Tony

CUSTOMER COPY