



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T1171016-1A	Vicky	2017.10.18

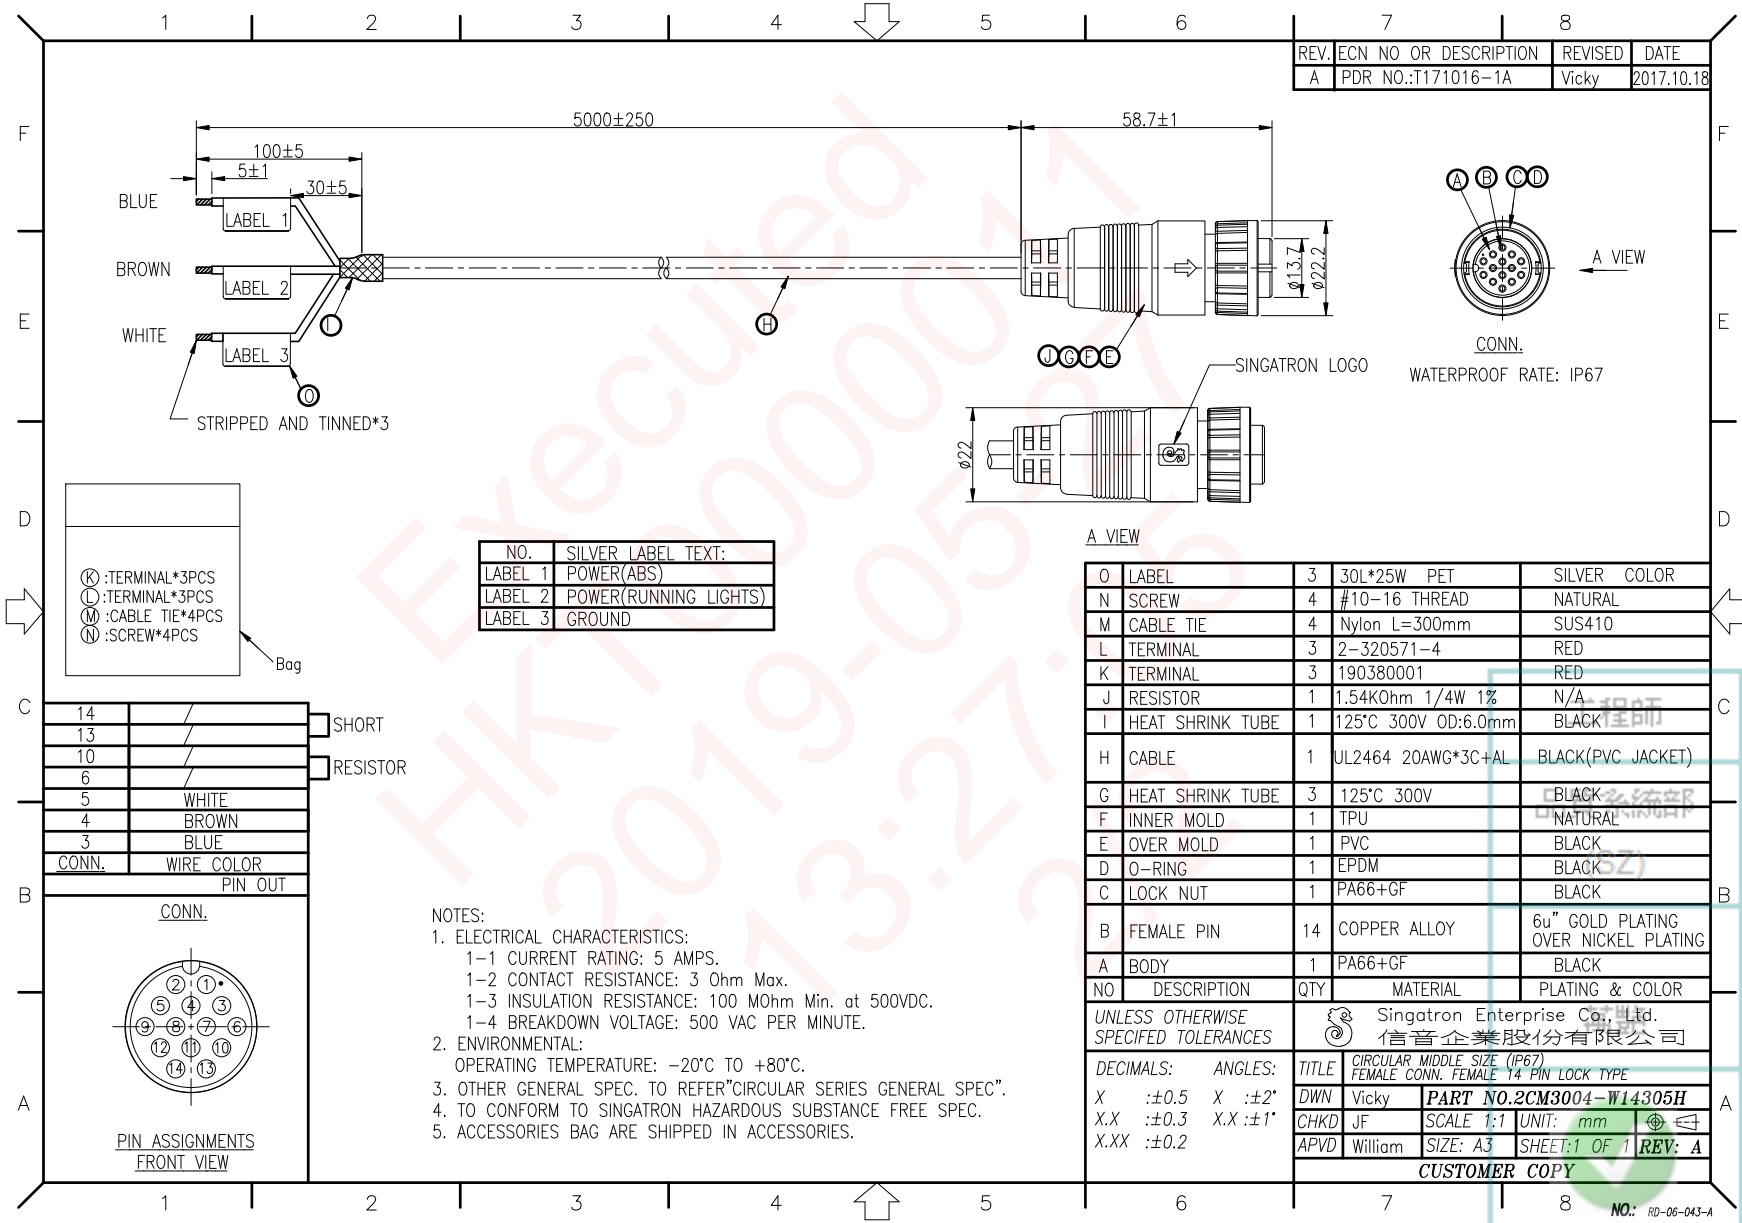

- ⊗ : TERMINAL*3PCS
 - ⊙ : TERMINAL*3PCS
 - ⊕ : CABLE TIE*4PCS
 - ⊖ : SCREW*4PCS
- Bag

NO.	SILVER LABEL TEXT:
LABEL 1	POWER(ABS)
LABEL 2	POWER(RUNNING LIGHTS)
LABEL 3	GROUND

14		SHORT
13		RESISTOR
10		
6		
5	WHITE	
4	BROWN	
3	BLUE	
CONN.	WIRE COLOR	
	PIN OUT	



- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1 CURRENT RATING: 5 AMPS.
 - 1-2 CONTACT RESISTANCE: 3 Ohm Max.
 - 1-3 INSULATION RESISTANCE: 100 MOhm Min. at 500VDC.
 - 1-4 BREAKDOWN VOLTAGE: 500 VAC PER MINUTE.
 - ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -20°C TO +80°C.
 - OTHER GENERAL SPEC. TO REFER "CIRCULAR SERIES GENERAL SPEC".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - ACCESSORIES BAG ARE SHIPPED IN ACCESSORIES.

O	LABEL	3	30L*25W PET	SILVER COLOR
N	SCREW	4	#10-16 THREAD	NATURAL
M	CABLE TIE	4	Nylon L=300mm	SUS410
L	TERMINAL	3	2-320571-4	RED
K	TERMINAL	3	190380001	RED
J	RESISTOR	1	1.54KOhm 1/4W 1%	N/A
I	HEAT SHRINK TUBE	1	125°C 300V OD:6.0mm	BLACK
H	CABLE	1	UL2464 20AWG*3C+AL	BLACK(PVC JACKET)
G	HEAT SHRINK TUBE	3	125°C 300V	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+GF	BLACK
B	FEMALE PIN	14	COPPER ALLOY	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Enterprise Co., Ltd. 	
DECIMALS:		ANGLES:		TITLE
X	:±0.5	X	:±2°	CIRCULAR MIDDLE SIZE (IP67) FEMALE CONN. FEMALE 14 PIN LOCK TYPE
X.X	:±0.3	X.X	:±1°	DWN Vicky PART NO.2CM3004-W14305H
X.XX	:±0.2			CHKD JF SCALE 1:1 UNIT: mm
				APVD William SIZE: A3 SHEET: 1 OF 1 REV: A
CUSTOMER COPY				

NO.: RD-06-043-A
2019/05/16
13:27:43