





REV: ECN NO OR DESCRIPTION	REVISED	DATE
A PDR NO.:S121220-4B&4C&4D	JF	2013.03.04

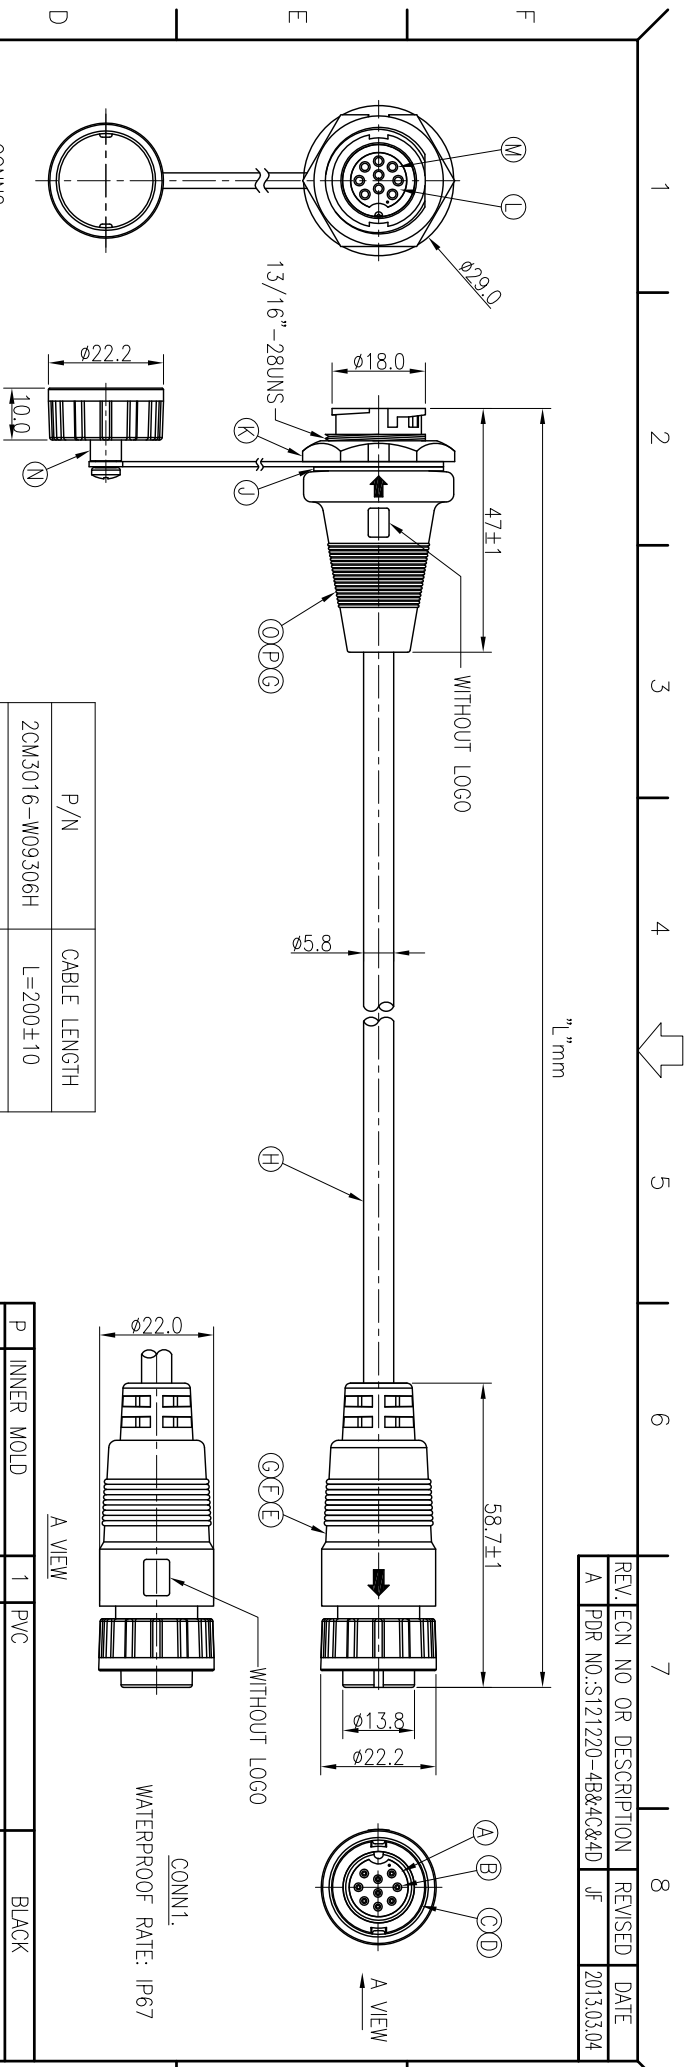

P/N	CABLE LENGTH
2CM3016-W09306H	L=200±10
2CM3016-W09307H	L=400±10
2CM3016-W09308H	L=600±20

CONN2	CONN1
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. CURRENT RATING: 5A
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GREEN PASS**

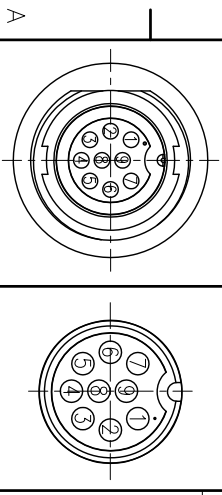

P	INNER MOLD	1	PVC	BLACK
O	OVER MOLD	1	TPU	NATURAL
N	WATERPROOF CAP	1	P/N:2CM3000-W0000W	N/A
M	FEMALE PIN	9	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
L	BODY	1	NYLON+33%GF	BLACK
K	PANEL NUT	1	NYLON+33%GF	BLACK
J	GASKET	1	EPDM	BLACK
H	CABLE	1	UL2464 24AWG*9C+AL UVRESISTANT OD=φ5.8	BLACK(PVC JACKET)
G	HEAT SHRINK TUBE	18	125' 300V L=9mm	BLACK
F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+33%GF	BLACK
B	MALE PIN	9	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+30%GF	BLACK

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	BODY	1	PA66+30%GF	BLACK
B	MALE PIN	9	BRASS	6u" GOLD PLATING OVER NICKEL PLATING

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°

XX :±0.3 XX :±1°

XXX :±0.2

TITLE	CIRCULAR MIDDLE SIZE (IP67) (9PIN) LOCK TYPE FEMALE CONN. MALE PIN+MALE CONN. FEMALE PIN
DMN	JF
CHKD	Horien
APVD	Steve
PART NO.	2CM3016-W0930XII
SCALE	1:1
UNIT	mm
SHEET	1 OF 1
REV	A

Singatron Enterprise Co., Ltd.
信亨企業股份有限公司

CUSTOMER COPY